


MOVA

695-51000164955001

MOVA M TURN BASIC R RECESSED SPOTLIGHT made of aluminium, white, similar to RAL 9016, decor white, high-efficiently vacuum deposited aluminium reflector beam asymmetric, light output direct, swiveling 350°, tilting 30°, without converter, max. 350/500/700/800mA, dimmability: see converter, IP20




SKETCH

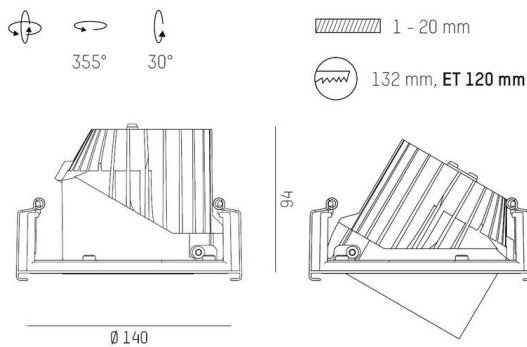

TECHNICAL DETAILS

Light source	LED 12W/17W/24W/28W
Luminous flux [lm]	1590/2200/2940/3290
Current sec. [mA]	350/500/700/800
Colour temperature	3000K
CRI	PREMIUM >90
Optics	vacuum deposited aluminium reflector
Converter	without converter
Dimmability	see converter
Light emission area	direct
Beam angle	asymmetric
Length [mm]	140
Height [mm]	94
Diameter [mm]	140
Ceiling cutout [mm]	132
Ceiling thickness [mm]	1-20
Mounting depth [mm]	120
IP protection class	IP20
IP protection class	protection cl. II
Material	aluminium
Colour of body	white
RAL	9016
Colour of decor	white
Lifetime [h]	L80 B10 50 000
Energy efficiency class	E
Net weight [kg]	0.58
EAN number	9010870049550

LIGHT DISTRIBUTION CURVE

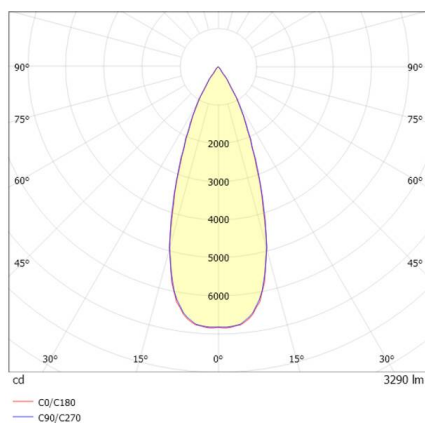

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.