



CONCEPT

723-001110114550

CONCEPT LEFT F FLOOR LAMP made of aluminium, white, similar to RAL 9016, microfaceted free-form reflector beam for single workplace, light output direct / indirect 30:70, UGR <19, with converter, max. 1500mA, dimmability: not dimmable, cable black, IP20 Membrane switch with USB connection (max.1A)

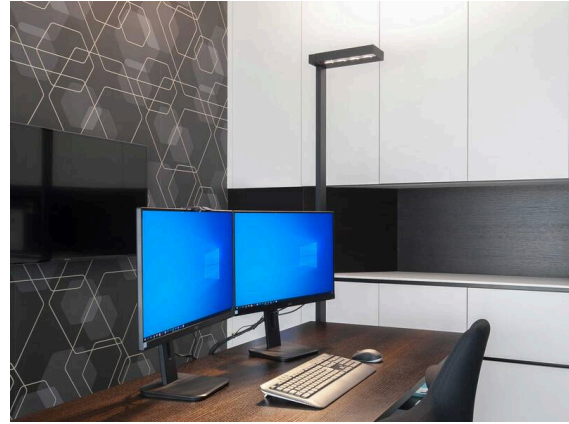


SKETCH

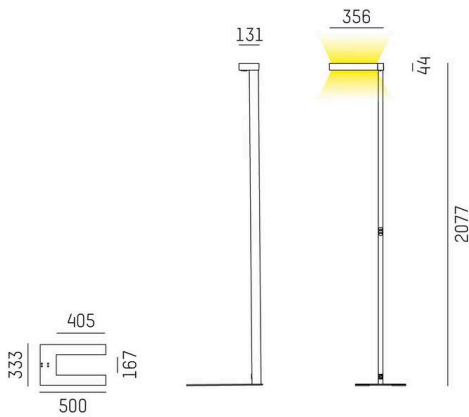

TECHNICAL DETAILS

|                           |                                  |
|---------------------------|----------------------------------|
| Light source              | LED                              |
| System performance [W]    | 70                               |
| Luminous flux [lm]        | 7710                             |
| Current sec. [mA]         | 1500                             |
| Colour temperature        | 4000K                            |
| CRI                       | >80                              |
| UGR                       | <19                              |
| Optics                    | microfaceted free-form reflector |
| Converter                 | with converter                   |
| Dimmability               | not dimmable                     |
| Light emission area       | direct / indirect 30:70          |
| Beam angle                | for single workplace             |
| Voltage                   | 220-240V AC/DC                   |
| Length [mm]               | 355                              |
| Width [mm]                | 131                              |
| Height [mm]               | 2077                             |
| IP protection class       | IP20                             |
| IP protection class       | protection cl. I                 |
| Material                  | aluminium                        |
| Colour of body            | white                            |
| RAL                       | 9016                             |
| Cable                     | black                            |
| Lifetime [h]              | L80 B10 50 000                   |
| Energy efficiency class   | D                                |
| Number of luminaires B16A | 24                               |
| Net weight [kg]           | 12.73                            |
| EAN number                | 9010506300925                    |

LIGHT DISTRIBUTION CURVE

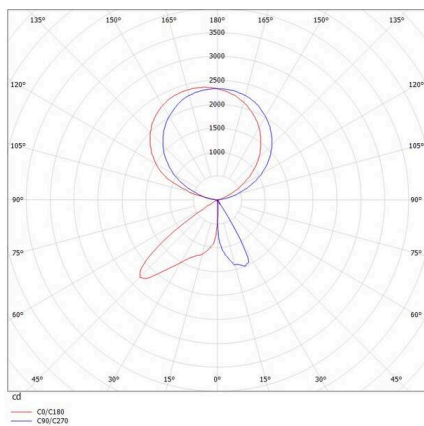

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.