

MAGNETICS

708-00913002906d

MAGNETICS H W SURFACE MOUNTED WALL LUMINAIRE made of die-cast aluminium, black, similar to RAL 9005, satined PMMA opal diffuser beam 100°, light output indirect, with converter, max. 700mA, dimmability: DALI 2, adapter/ceiling base black, IP20 directly without light inserts, indirectly illuminated



SKETCH



TECHNICAL DETAILS


Light source	LED
System performance [W]	26W/ MAX 100
Luminous flux [lm]	1749
Current sec. [mA]	700
Colour temperature	3000K
CRI	>90
Optics	PMMA opal diffuser
Converter	with converter
Dimmability	DALI 2
Light emission area	indirect
Beam angle [°]	100°
Voltage	220-240V 50/60Hz

Length [mm]	2003
Width [mm]	47,5
Height [mm]	35
IP protection class	IP20
IP protection class	protection cl. I
IK value	IK03

Material	die-cast aluminium
Colour of body	black
RAL	9005
Colour of adapter / ceiling base	black
Lifetime [h]	L80 B10 50 000
Energy efficiency class	F
Number of luminaires B16A	11

Net weight [kg]	2.50
EAN number	9010506736762

LIGHT DISTRIBUTION CURVE

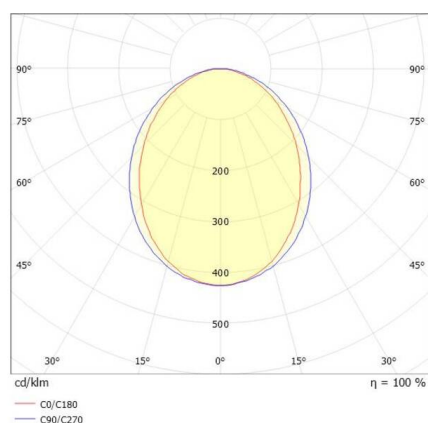

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.