

MAGNETICS

708-00912002406d

MAGNETICS H W SURFACE MOUNTED WALL LUMINAIRE made of die-cast aluminium, black, similar to RAL 9005, satined PMMA opal diffuser beam 100°, light output indirect, with converter, max. 700mA, dimmability: DALI 2, adapter/ceiling base black, IP20 directly without light inserts, indirectly illuminated



SKETCH



TECHNICAL DETAILS


Light source LED
 System performance [W] 18W/ MAX 100
 Luminous flux [lm] 1219
 Current sec. [mA] 700
 Colour temperature 4000K
 CRI >90
 Optics PMMA opal diffuser
 Converter with converter
 Dimmability DALI 2
 Light emission area indirect
 Beam angle [°] 100°
 Voltage 220-240V 50/60Hz

Length [mm] 1403
 Width [mm] 47,5
 Height [mm] 35
 IP protection class IP20
 IP protection class protection cl. I
 IK value IK03

Material die-cast aluminium
 Colour of body black
 RAL 9005
 Colour of adapter / ceiling base black
 Lifetime [h] L80 B10 50 000
 Energy efficiency class F
 Number of luminaires B16A 11

Net weight [kg] 2.06
 EAN number 9010506736748

LIGHT DISTRIBUTION CURVE

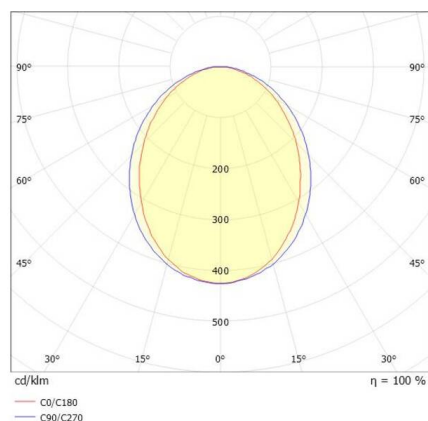

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.