



LENS

646-115120524080

LENS SHORT QUAD F FLOOR LAMP made of die-cast aluminium, natural anodised, similar to RAL 9006, lens optic with anti-glare grid beam for quadruple workplace, light output direct / indirect, UGR <16, with converter, max. 525mA, dimmability: not dimmable, cable black, IP20 Membrane switch with USB connection (max.0,5A)

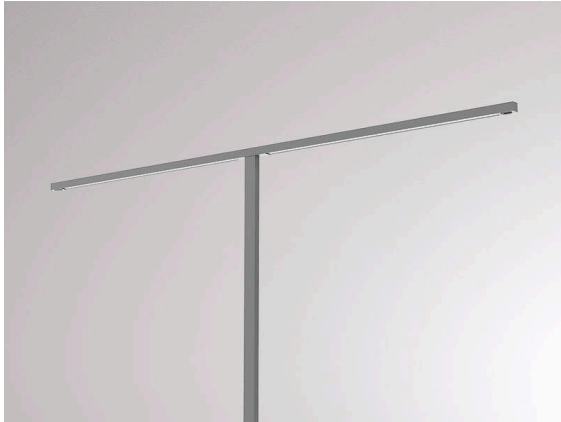


SKETCH

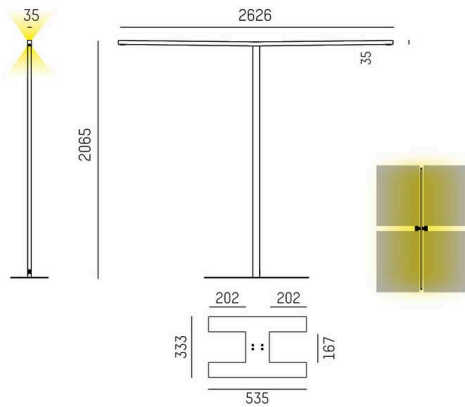

TECHNICAL DETAILS

| | |
|---------------------------|---------------------------------------|
| Light source | LED |
| System performance [W] | 179 |
| Luminous flux [lm] | 22492 |
| Current sec. [mA] | 525 |
| Colour temperature | 4000K |
| CRI | >80 |
| UGR | <16 |
| Optics | lens optics with glare control louvre |
| Converter | with converter |
| Dimmability | not dimmable |
| Light emission area | direct / indirect |
| Beam angle | for quadruple workplace |
| Voltage | 220-240V AC/DC |
| Length [mm] | 2626 |
| Width [mm] | 35 |
| Height [mm] | 2065 |
| IP protection class | IP20 |
| IP protection class | protection cl. I |
| IK value | IK05 |
| Material | die-cast aluminium |
| Colour of body | aluminium anodised |
| RAL | 9006 |
| Cable | black |
| Lifetime [h] | L80 B10 50 000 |
| Energy efficiency class | E |
| Number of luminaires B16A | 22 |
| Net weight [kg] | 13.99 |
| EAN number | 9010506805345 |

LIGHT DISTRIBUTION CURVE

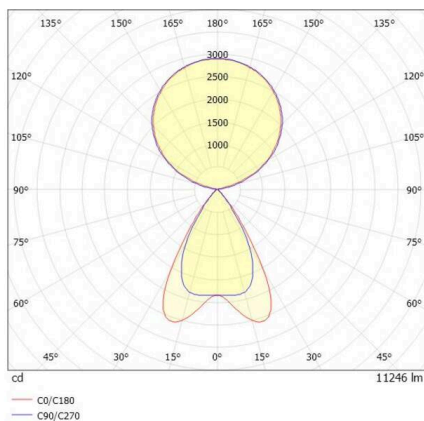

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.