
## AFTER 8


**678-0030110232sc**

AFTER 8 SHORT PDI SUSPENSION made of aluminium, champagne anodised,opal diffuser light output direct / indirect 60:40, with converter, max. 1050mA, dimmability: Casambi, cable Tension control in the suspension ropes, adapter/ceiling base white, pendant length 2000mm, IP20



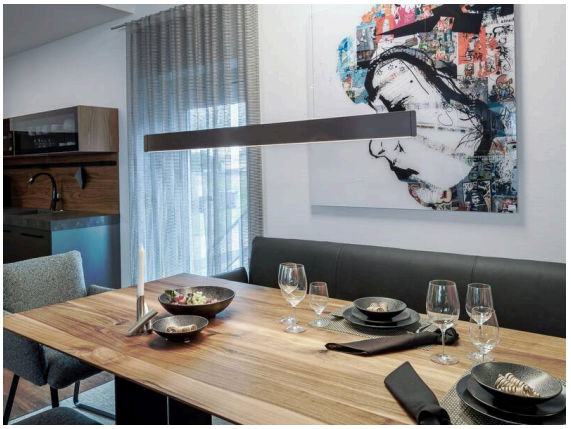


### Sketch

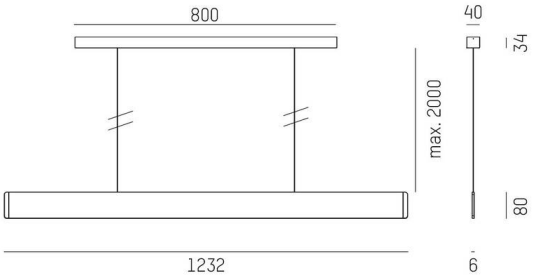


### Technical details

| | |
|---|---|
| Light source | LED |
| System performance [W] | 41 |
| Luminous flux [lm] | 1760 |
| Current sec. [mA] | 1050 |
| Colour temperature | 2700K |
| CRI | >90 |
| Optics | opal diffuser |
| Converter | with converter |
| Dimmability | Casambi |
| Light emission area | direct / indirect 60:40 |
| Voltage | 220-240V 50/60Hz |
| | |
| Length [mm] | 1232 |
| Width [mm] | 6 |
| Height [mm] | 80 |
| Length pendant [mm] | 2000 |
| IP protection class | IP20 |
| IP protection class | protection cl. I |
| | |
| Material | aluminium |
| Colour of body | champagne anodised |
| Colour of adapter / ceiling base | white |
| Cable | Tension control in the suspension ropes |
| Lifetime [h] | L80 B10 50 000 |
| Energy efficiency class | E |
| Number of luminaires B16A | 15 |
| | |
| Net weight [kg] | 3.85 |
| EAN number | 9010979522602 |

### Light distribution curve

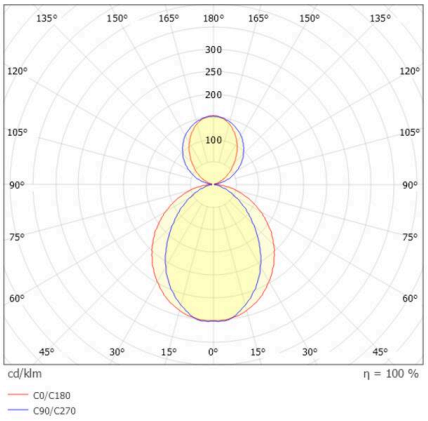


Energy label

CE

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.