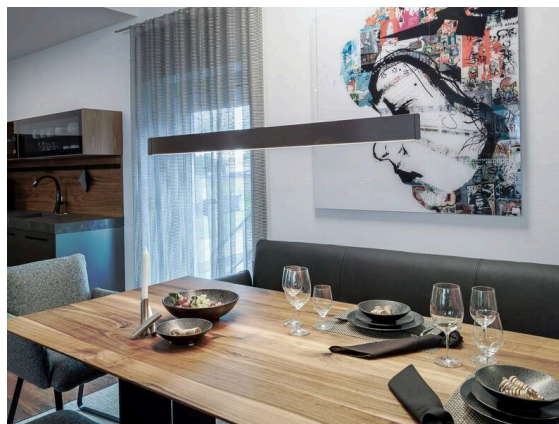
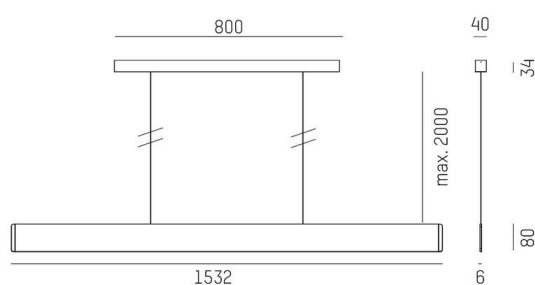


AFTER 8**678-0040210232sc**

AFTER 8 LONG PDI SUSPENSION made of aluminium, champagne anodised, opal diffuser light output direct / indirect 60:40, with converter, max. 1050mA, dimmability: Casambi, cable Tension control in the suspension ropes, adapter/ceiling base black, pendant length 2000mm, IP20

**Sketch****Technical details**

Light source LED
 System performance [W] 51
 Luminous flux [lm] 2200
 Current sec. [mA] 1050
 Colour temperature 2700K
 CRI >90
 Optics opal diffuser
 Converter with converter
 Dimmability Casambi
 Light emission area direct / indirect 60:40
 Voltage 220-240V 50/60Hz


Length [mm] 1532
 Width [mm] 6
 Height [mm] 80
 Length pendant [mm] 2000
 IP protection class IP20
 IP protection class protection cl. I

Material aluminium
 Colour of body champagne anodised
 Colour of adapter / ceiling base black
 Cable Tension control in the suspension ropes
 Lifetime [h] L80 B10 50 000
 Energy efficiency class E
 Number of luminaires B16A 15

Net weight [kg] 4.29
 EAN number 9010979522961



Energy label

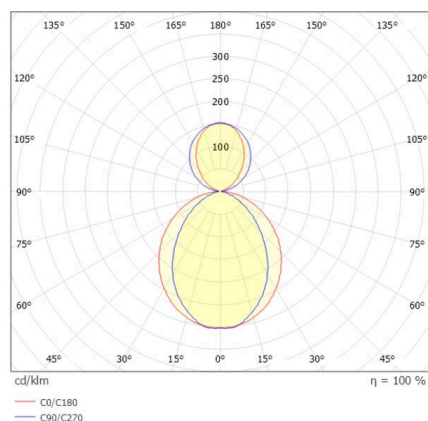Light distribution curve

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.

Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.