

## LOG 50 RING


722-0201b021130500d

LOG 50 RING 90° PD SUSPENSION made of aluminium, white, similar to RAL 9016, satined PMMA opal diffuser light output direct, with converter, max. 700mA, dimmability: DALI, through wiring 3x1,5mm<sup>2</sup> + 2x0,75mm<sup>2</sup>, pendant length 3000mm, IP20

## SKETCH



## LIGHT DISTRIBUTION CURVE

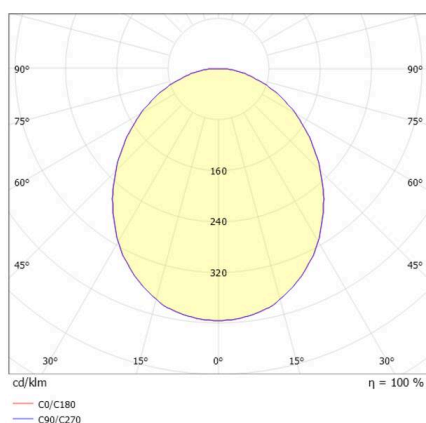

## TECHNICAL DETAILS

|                           |  |
|---------------------------|--|
| Light source              | LED  |
| System performance [W]    | 19   |
| Luminous flux [lm]        | 2500   |
| Current sec. [mA]         | 700  |
| Colour temperature        | 2700K  |
| CRI                       | >80  |
| Optics                    | PMMA opal diffuser                           |
| Converter                 | with converter                               |
| Dimmability               | DALI   |
| Light emission area       | direct                                       |
| Voltage                   | 220-240V 50/60Hz                             |
| Through wiring            | 3x1,5mm <sup>2</sup> + 2x0,75mm <sup>2</sup> |
| Length [mm]               | 562,5  |
| Width [mm]                | 52   |
| Height [mm]               | 65   |
| Length pendant [mm]       | 3000   |
| Diameter [mm]             | 1125   |
| IP protection class       | IP20   |
| IP protection class       | protection cl. I                             |
| IK value                  | IK03   |
| Material                  | aluminium                                    |
| Colour of body            | white  |
| RAL                       | 9016   |
| Lifetime [h]              | L80 B10 50 000                               |
| Energy efficiency class   | C  |
| Number of luminaires B16A | 50   |
| Net weight [kg]           | 3,34   |
| EAN number                | 9010870199774                                |



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.