
## LENS


## 646-108020529050

LENS SHORT DOUBLE PDI SUSPENSION made of die-cast aluminium, white, similar to RAL 9016,lens optic with anti-glare grid beam for double workplace, light output direct / indirect, UGR <16, with converter, max. 525mA, dimmability: not dimmable, cable transparent, adapter/ceiling base white matt, pendant length 1500mm, IP20



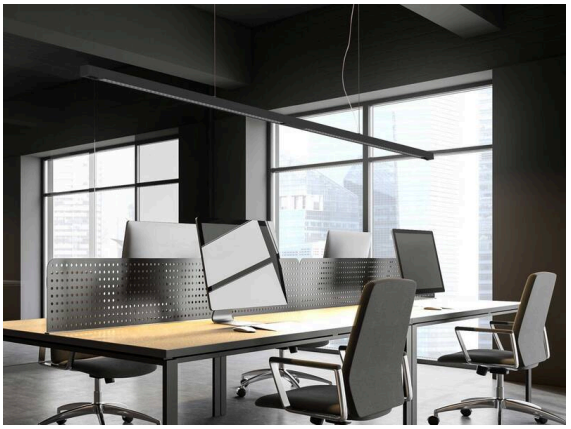


### Sketch

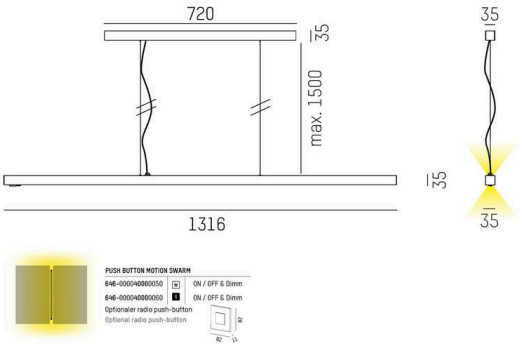


### Technical details

| | |
|---|---|
| Light source | LED |
| System performance [W] | 90 |
| Luminous flux [lm] | 10916 |
| Current sec. [mA] | 525 |
| Colour temperature | 3000K |
| CRI | >80 |
| UGR | <16 |
| Optics | lens optics with glare control louvre |
| Converter | with converter |
| Dimmability | not dimmable |
| Light emission area | direct / indirect |
| Beam angle | for double workplace |
| Voltage | 220-240V AC/DC |
| | |
| Length [mm] | 1316 |
| Width [mm] | 35 |
| Height [mm] | 35 |
| Length pendant [mm] | 1500 |
| IP protection class | IP20 |
| IP protection class | protection cl. I |
| IK value | IK05 |
| | |
| Material | die-cast aluminium |
| Colour of body | white |
| RAL | 9016 |
| Colour of adapter / ceiling base | white |
| Cable | transparent |
| Lifetime [h] | L80 B10 50 000 |
| Energy efficiency class | E |
| Number of luminaires B16A | 22 |
| | |
| Net weight [kg] | 4.76 |
| EAN number | 9010506807837 |

### Light distribution curve

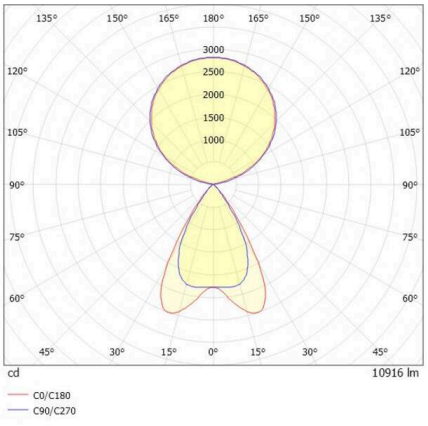


Energy label

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.