


MC BAFFEL

A50-014951124306p

BAFFEL SPOT TRACK SPOTLIGHT WITH 3 PH ADAPTER black, similar to RAL 9005, decor black, high-efficiently vacuum deposited synthetic reflector beam 17°, accessoire: glass, light output direct, swiveling 350°, tilting 90°, with converter, max. 700mA, dimmability: Pulse-DALI, cable transparent, adapter/ceiling base black, pendant length 1500mm, IP20




SKETCH

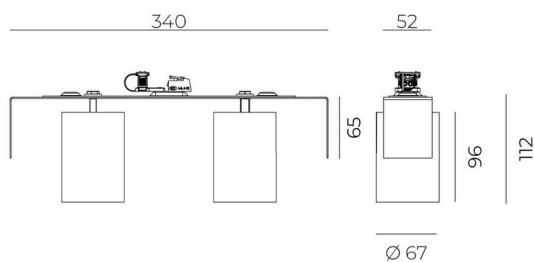

TECHNICAL DETAILS

Light source	LED
System performance [W]	2X14
Luminous flux [lm]	2x 1370
Current sec. [mA]	700
Colour temperature	2700K
CRI	PREMIUM>90
Optics	vacuum deposited synthetic reflector
Converter	with converter
Dimmability	Pulse-DALI
Light emission area	direct
Beam angle [°]	17°
Voltage	220-240V 50/60Hz
Length [mm]	67
Width [mm]	52
Height [mm]	150
Length pendant [mm]	1500
IP protection class	IP20
IP protection class	protection cl. II
Colour of body	black
RAL	9005
Colour of adapter / ceiling base	black
Colour of decor	black
Cable	transparent
Lifetime [h]	L80 B10 50 000
Energy efficiency class	E
Net weight [kg]	1.62
EAN number	9010979756397

LIGHT DISTRIBUTION CURVE

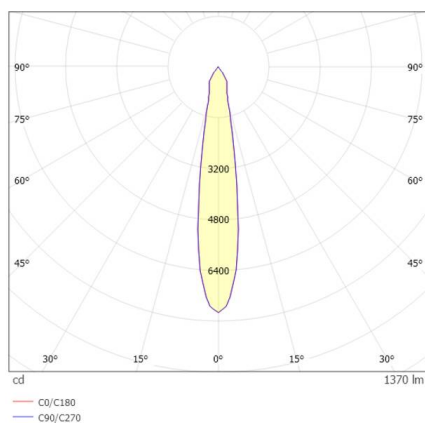

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.