


**MAGNETICS**

**708-002020347060**

MAGNETICS SPOT M TRACK SPOTLIGHT WITH 24V ADAPTER made of aluminium, black, similar to RAL 9005, high-efficiently vacuum deposited synthetic reflector beam 38°, light output direct, swiveling 350°, tilting 90°, without converter, max. 265mA, dimmability: not dimmable, adapter/ceiling base black, IP20




**SKETCH**

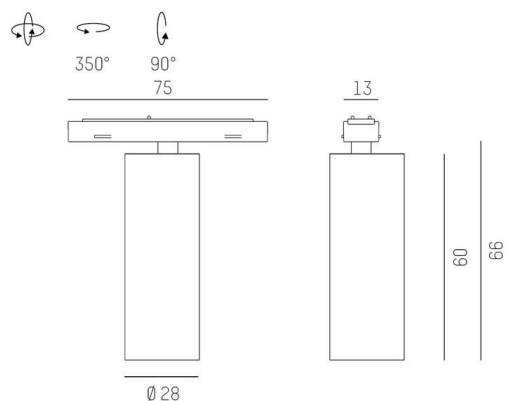

**TECHNICAL DETAILS**

|                                  |                                      |
|----------------------------------|--------------------------------------|
| Light source                     | LED                                  |
| System performance [W]           | 7                                    |
| Luminous flux [lm]               | 410                                  |
| Current sec. [mA]                | 265                                  |
| Colour temperature               | 3500K                                |
| CRI                              | PREMIUM>90                           |
| Optics                           | vacuum deposited synthetic reflector |
| Converter                        | without converter                    |
| Dimmability                      | not dimmable                         |
| Light emission area              | direct                               |
| Beam angle                       | 38°                                  |
| Voltage                          | 24 VDC                               |
| Length [mm]                      | 79,5                                 |
| Width [mm]                       | 28                                   |
| Height [mm]                      | 66                                   |
| Diameter [mm]                    | 28                                   |
| IP protection class              | IP20                                 |
| IP protection class              | protection cl. III                   |
| IK value                         | IK03                                 |
| Material                         | aluminium                            |
| Colour of body                   | black                                |
| RAL                              | 9005                                 |
| Colour of adapter / ceiling base | black                                |
| Lifetime [h]                     | L80 B10 50 000                       |
| Energy efficiency class          | E                                    |
| Net weight [kg]                  | 0,30                                 |
| EAN number                       | 9010506292190                        |

**LIGHT DISTRIBUTION CURVE**

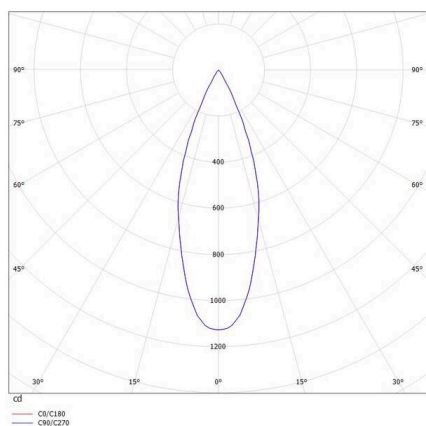

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.