

MAGNETICS

708-003031029060

MAGNETICS OPAL EINSATZ SYSTEM LIGHT INSERT WITH 24V ADAPTER made of PMMA, white, satined PMMA opal diffuser beam 110°, light output direct, without converter, dimmability: not dimmable, IP20




SKETCH



TECHNICAL DETAILS

| | |
|-------------------------|--------------------|
| Light source | LED |
| System performance [W] | 4 |
| Luminous flux [lm] | 270 |
| Colour temperature | 3000K |
| CRI | >90 |
| Optics | PMMA opal diffuser |
| Converter | without converter |
| Dimmability | not dimmable |
| Light emission area | direct |
| Beam angle | 110° |
| Voltage | 24 VDC |
| Length [mm] | 300 |
| Width [mm] | 13,7 |
| Height [mm] | 8,8 |
| IP protection class | IP20 |
| IP protection class | protection cl. III |
| IK value | IK03 |
| Material | PMMA |
| Colour of body | white |
| Lifetime [h] | L80 B10 50 000 |
| Energy efficiency class | F |
| Net weight [kg] | 0.36 |
| EAN number | 9010506270396 |

LIGHT DISTRIBUTION CURVE

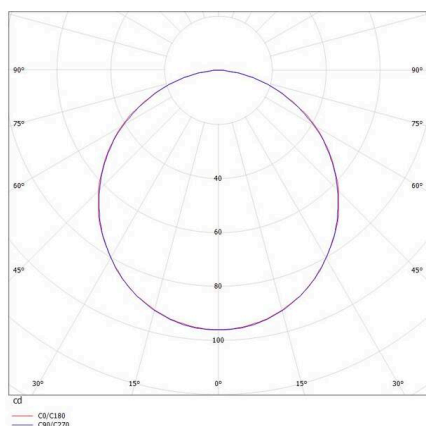

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.