

**MAGNETICS**

**708-003051023060**

MAGNETICS OPAL EINSATZ SYSTEM LIGHT INSERT WITH 24V ADAPTER made of PMMA, satined white, satined PMMA opal diffuser beam 110°, light output direct, without converter, dimmability: not dimmable, IP20




**SKETCH**



**TECHNICAL DETAILS**

Light source	LED
System performance [W]	12
Luminous flux [lm]	810
Colour temperature	2700K
CRI	>90
Optics	PMMA opal diffuser
Converter	without converter
Dimmability	not dimmable
Light emission area	direct
Beam angle	110°
Voltage	24 VDC
Length [mm]	898,5
Width [mm]	13,7
Height [mm]	8,8
IP protection class	IP20
IP protection class	protection cl. III
IK value	IK03
Material	PMMA
Colour of body	white
Lifetime [h]	L80 B10 50 000
Energy efficiency class	F
Net weight [kg]	0.96
EAN number	9010506222517

**LIGHT DISTRIBUTION CURVE**

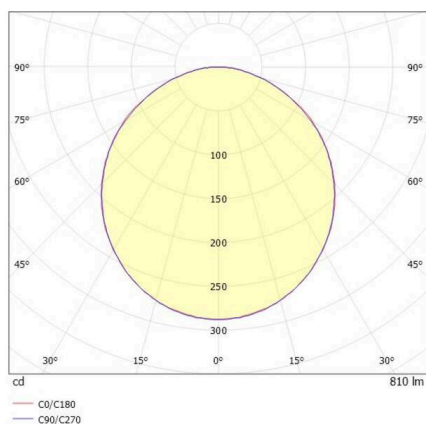

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.