



LOG 50

715-070411041900d

LOG 50 OFFICE EINSATZ LIGHT INSERT made of metal, Lens optics with vacuum deposited synthetic reflector beam 66°, light output direct, UGR <16, with converter, max. 340mA, dimmability: DALI, through wiring 3x1,5mm² + 2x0,75mm², IP20

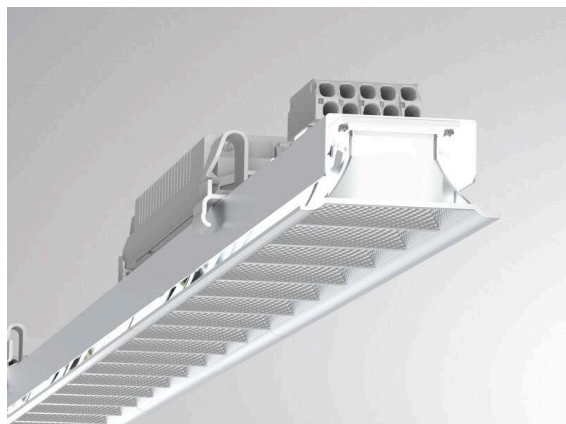

LIGHT DISTRIBUTION CURVE

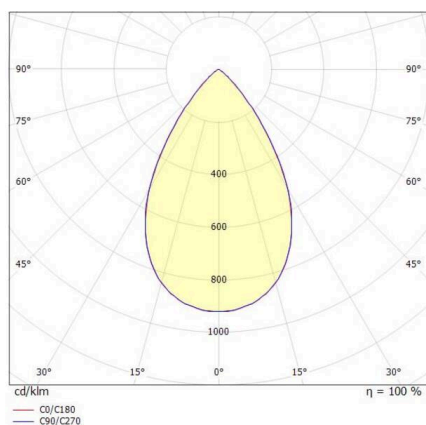

TECHNICAL DETAILS

Light source	LED
System performance [W]	16
Luminous flux [lm]	2140
Current sec. [mA]	340
Colour temperature	3000K
CRI	>80
UGR	<16
Optics	Lens optics with vacuum deposited synthetic reflector with converter
Converter	DALI
Dimmability	DALI
Light emission area	direct
Beam angle	66°
Voltage	220-240V 50/60Hz
Through wiring	3x1,5mm ² + 2x0,75mm ²
Length [mm]	841,5
Width [mm]	49
Height [mm]	50
IP protection class	IP20
IP protection class	protection cl. I
Material	metal
Lifetime [h]	L80 B10 50 000
Energy efficiency class	D
Number of luminaires B16A	50
Net weight [kg]	0.75
EAN number	9010506389630



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.