



LENS 2

606-000832120011966v


LENS 2 QUAD F FLOOR LAMP made of aluminium, black, similar to RAL 9005, Hybrid optics consisting of free-form lenses, micro-faceted high-gloss reflectors and black anti-glare louvre beam for quadruple workplace, base plate black, light output direkt/- indirekt 20:80, UGR <16, with converter, dimmability: Sensor Matrix, With motion detector including individual workstation detection and multi-sensor daylight control, IP20 with glass touch control panel with integrated display / lower edge of control panel 1150mm,

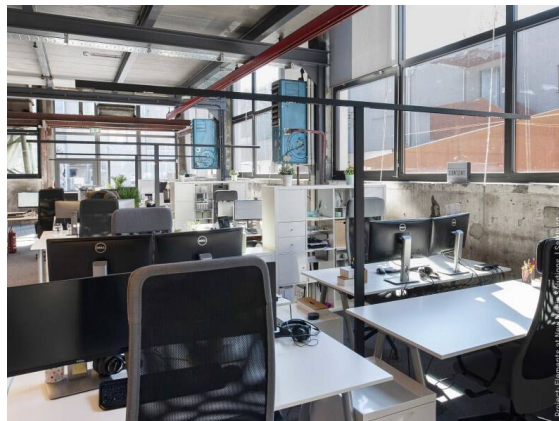

SKETCH

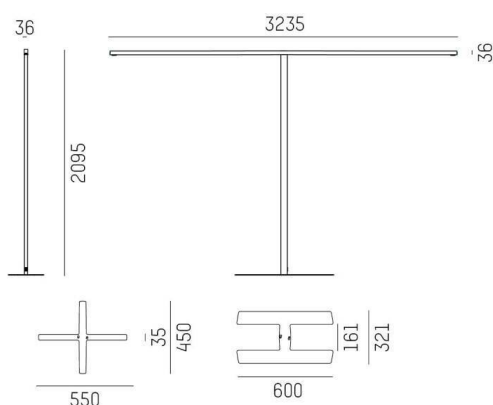

LIGHT DISTRIBUTION CURVE

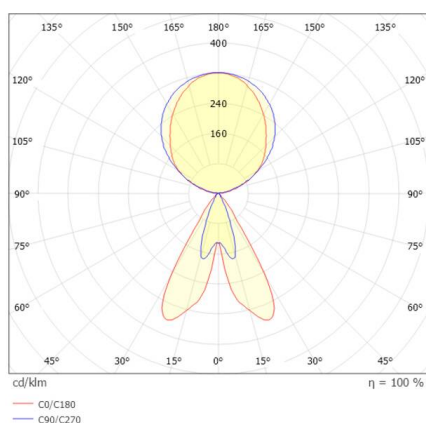

TECHNICAL DETAILS

Light source	LED
System performance [W]	152/164/178/220
Luminous flux [lm]	23260/25200/27200/32840
Colour temperature	3000K
CRI	>80
UGR	<16
Optics	Hybrid optics consisting of free-form lenses, micro-faceted high-gloss reflectors and black anti-glare louvre with converter
Converter	Sensor Matrix
Dimmability	direkt/- indirekt 20:80
Light emission area	for quadruple workplace
Beam angle [°]	220-240V 50/60Hz
Voltage	With motion detector including individual workstation detection and multi-sensor daylight control
Motion detector	
Length [mm]	3235
Width [mm]	36
Height [mm]	2095
IP protection class	IP20
IP protection class	protection cl. I
Material	aluminium
Colour of body	black
Colour Base Plate	black
RAL	9005
Lifetime [h]	L80 B10 100 000
Energy efficiency class	C
Number of luminaires B16A	12
Net weight [kg]	17.92
EAN number	9010979428980



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.