


VALO

720-007321023550

VALO HV PDI SUSPENSION made of aluminium, white, similar to RAL 9016, PMMA cover light output direct / indirect, with converter, max. 700mA, dimmability: not dimmable, cable transparent, adapter/ceiling base white, pendant length 1500mm, IP20




SKETCH

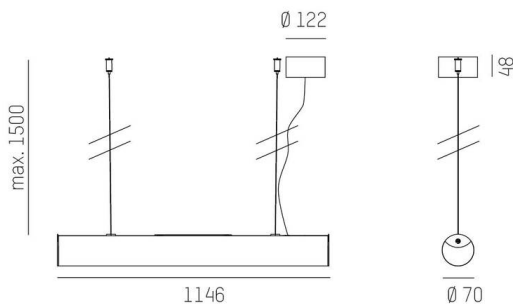

TECHNICAL DETAILS

Light source	LED
System performance [W]	26
Luminous flux [lm]	2920
Current sec. [mA]	700
Colour temperature	2700K
CRI	>90
Optics	PMMA diffuser
Converter	with converter
Dimmability	not dimmable
Light emission area	direct / indirect
Voltage	220-240V 50/60Hz
Length pendant [mm]	1500
Diameter [mm]	70
IP protection class	IP20
IP protection class	protection cl. II
IK value	IK02
Material	aluminium
Colour of body	white
RAL	9016
Colour of adapter / ceiling base	white
Cable	transparent
Lifetime [h]	L80 B10 50 000
Energy efficiency class	E
Number of luminaires B16A	50
Net weight [kg]	1.85
EAN number	9010506836813

LIGHT DISTRIBUTION CURVE

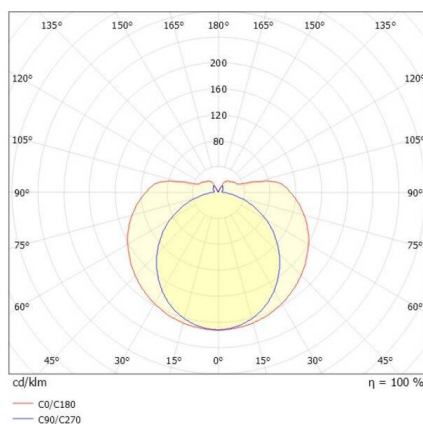

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.