


LOG 50 RING

722-020131111906000

LOG 50 RING PD SUSPENSION made of aluminium, black, similar to RAL 9005, satined PMMA opal diffuser light output direct, with converter, max. 350mA, dimmability: not dimmable, cable transparent, adapter/ceiling base black, pendant length 3000mm, IP20




SKETCH

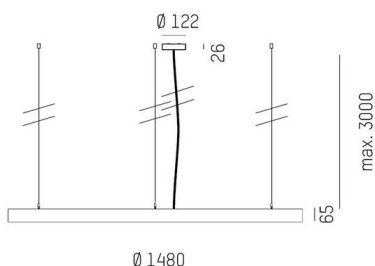

TECHNICAL DETAILS

Light source	LED
System performance [W]	53
Luminous flux [lm]	6900
Current sec. [mA]	350
Colour temperature	3000K
CRI	>80
Optics	PMMA opal diffuser
Converter	with converter
Dimmability	not dimmable
Light emission area	direct
Voltage	220-240V 50/60Hz
Length [mm]	1480
Width [mm]	52
Height [mm]	65
Length pendant [mm]	3000
Diameter [mm]	1480
IP protection class	IP20
IP protection class	protection cl. I
IK value	IK03
Material	aluminium
Colour of body	black
RAL	9005
Colour of adapter / ceiling base	black
Cable	transparent
Lifetime [h]	L80 B10 50 000
Energy efficiency class	C
Number of luminaires B16A	12
Net weight [kg]	10.13
EAN number	9010870274495

LIGHT DISTRIBUTION CURVE

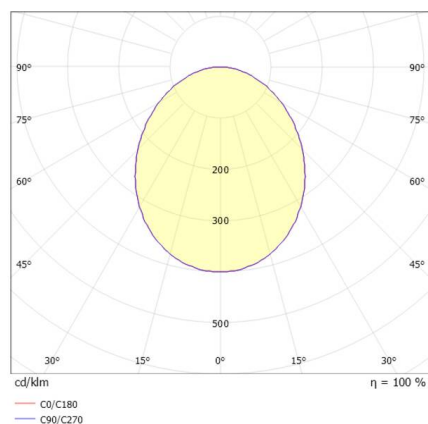

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.