
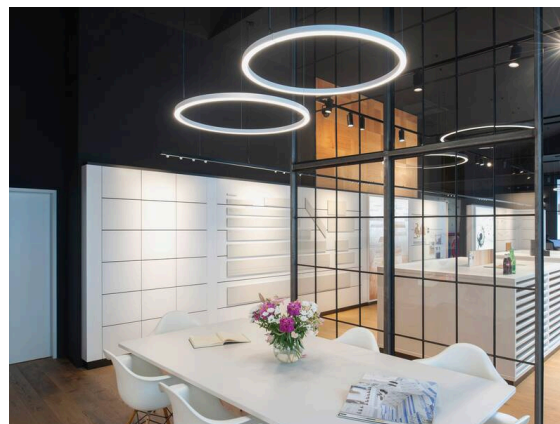



RIDE RING

675-10201102304d

RIDE RING SD WALL / CEILING LUMINAIRE made of die-cast aluminium, grey, similar to RAL 9006, satined PMMA diffuser for homogeneous illumination light output direct, with converter, max. 500mA, dimmability: DALI, IP20

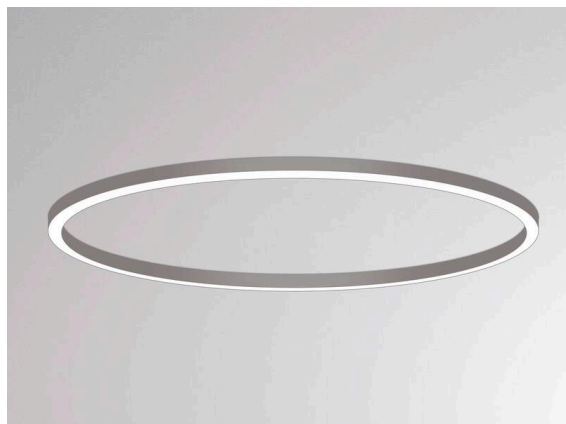


SKETCH

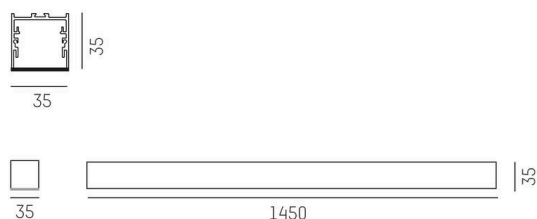

TECHNICAL DETAILS

Light source	LED
System performance [W]	76
Luminous flux [lm]	6610
Current sec. [mA]	500
Colour temperature	2700K
CRI	>90
Optics	PMMA opal diffuser flat with converter
Converter	DALI
Dimmability	direct
Light emission area	220-240V 50/60Hz
Voltage	
Length [mm]	1451,5
Width [mm]	35
Height [mm]	35
Diameter [mm]	1450
IP protection class	IP20
IP protection class	protection cl. I
Material	die-cast aluminium
Colour of body	grey
RAL	9006
Lifetime [h]	L80 B10 50 000
Number of luminaires B16A	16
Net weight [kg]	12.65
EAN number	9008905918957

LIGHT DISTRIBUTION CURVE

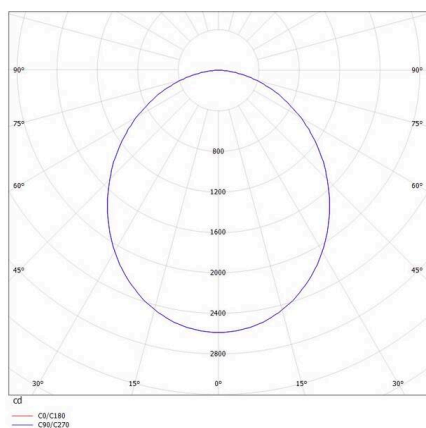

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.