


RIDE RING

675-20201102904d

RIDE RING PD SUSPENSION made of die-cast aluminium, grey, similar to RAL 9006, satined PMMA diffuser for homogeneous illumination light output direct, with converter, max. 500mA, dimmability: DALI, cable transparent, adapter/ceiling base grey, pendant length 1500mm, IP20



Sketch

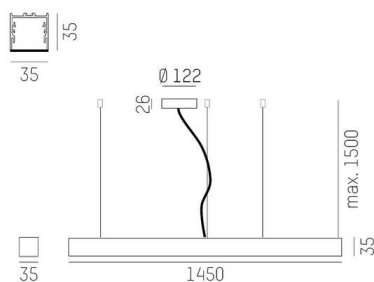

Technical details

Light source	LED
System performance [W]	76
Luminous flux [lm]	7180
Current sec. [mA]	500
Colour temperature	3000K
CRI	>90
Optics	PMMA opal diffuser flat with converter
Converter	DALI
Dimmability	direct
Light emission area	220-240V 50/60Hz
Voltage	

Length [mm]	1451,5
Width [mm]	35
Height [mm]	35
Length pendant [mm]	1500
Diameter [mm]	1450
IP protection class	IP20
IP protection class	protection cl. I
IK value	IK03


Material	die-cast aluminium
Colour of body	grey
RAL	9006
Colour of adapter / ceiling base	grey
Cable	transparent
Lifetime [h]	L80 B10 50 000
Energy efficiency class	E
Number of luminaires B16A	16

Net weight [kg]	13.04
EAN number	9008905919176



Energy label

Light distribution curve

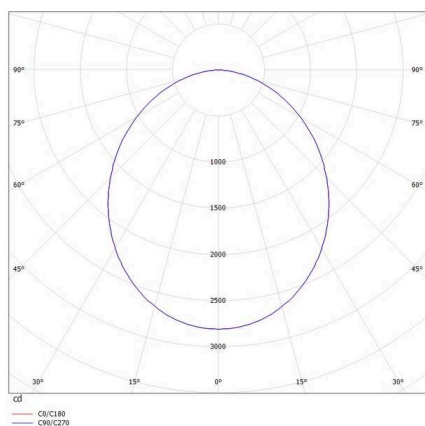

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.

Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.