



## SOP0

100-q24190110

SOPO SQUARE M SD WALL / CEILING LUMINAIRE made of aluminium, anthrazite, similar to RAL 7024, beam 110°, light output direct, with converter, max. 500mA, dimmability: not dimmable, IP54

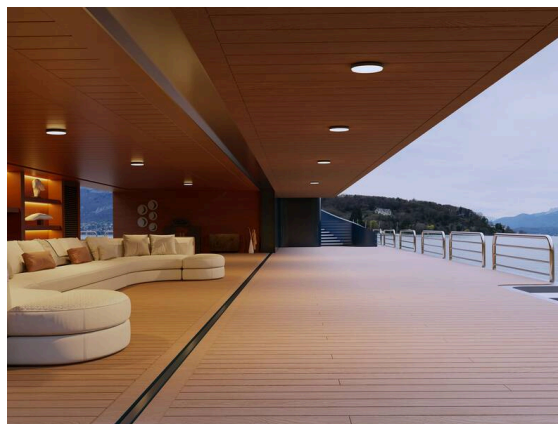


## SKETCH



## TECHNICAL DETAILS

|                         |                  |
|-------------------------|------------------|
| Light source            | LED              |
| System performance [W]  | 25               |
| Luminous flux [lm]      | 2755             |
| Current sec. [mA]       | 500              |
| Colour temperature      | 3000K            |
| CRI                     | >80              |
| Converter               | with converter   |
| Dimmability             | not dimmable     |
| Light emission area     | direct           |
| Beam angle              | 110°             |
| Voltage                 | 220-240V 50/60Hz |
| Length [mm]             | 240              |
| Width [mm]              | 240              |
| Height [mm]             | 49               |
| IP protection class     | IP54             |
| IP protection class     | protection cl. I |
| IK value                | IK10             |
| Material                | aluminium        |
| Colour of body          | anthrazite       |
| RAL                     | 7024             |
| Lifetime [h]            | L80 B10 20 000   |
| Energy efficiency class | D                |
| Net weight [kg]         | 1.03             |
| EAN number              | 9010506456486    |

## LIGHT DISTRIBUTION CURVE

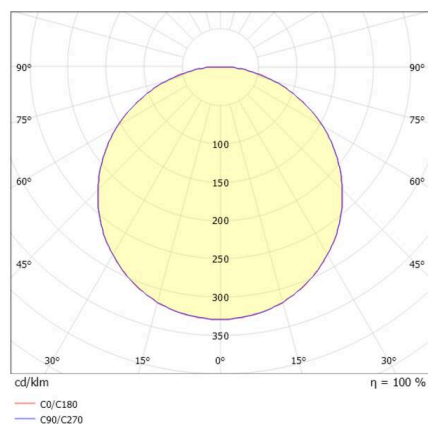

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.