



SOP0

100-r24190110

SOP0 ROUND M SD WALL / CEILING LUMINAIRE made of aluminium, anthrazite, similar to RAL 7024, polycarbonate cover beam 110°, light output direct, with converter, max. 500mA, dimmability: not dimmable, IP54

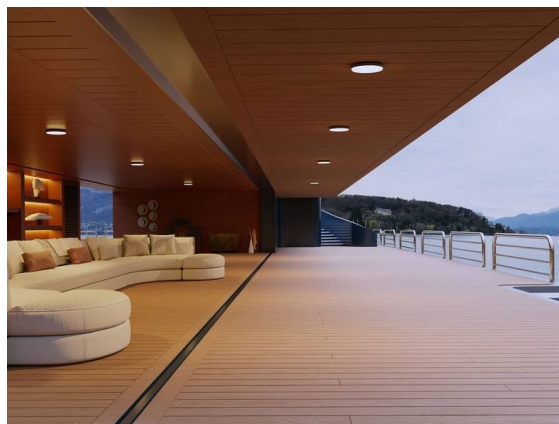


SKETCH

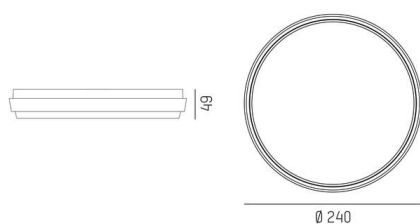

TECHNICAL DETAILS

Light source	LED
System performance [W]	25
Luminous flux [lm]	2570
Current sec. [mA]	500
Colour temperature	3000K
CRI	>80
Optics	polycarbonate cover
Converter	with converter
Dimmability	not dimmable
Light emission area	direct
Beam angle	110°
Voltage	220-240V 50/60Hz
Height [mm]	49
Diameter [mm]	240
IP protection class	IP54
IP protection class	protection cl. I
IK value	IK10
Material	aluminium
Colour of body	anthrazite
RAL	7024
Lifetime [h]	L80 B10 20 000
Energy efficiency class	D
Net weight [kg]	0.83
EAN number	9010506456608

LIGHT DISTRIBUTION CURVE

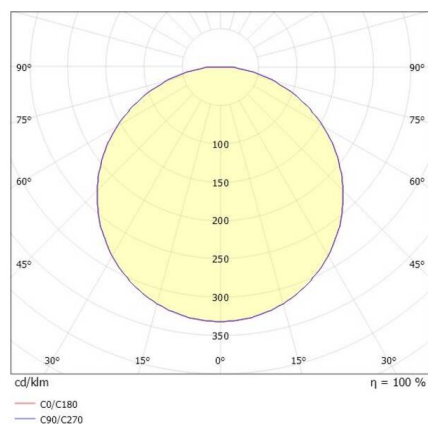

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.