



## SOP0

100-r30190740

SOP0 ROUND L SD WALL / CEILING LUMINAIRE made of aluminium, grey, similar to RAL 7042, polycarbonate cover beam 110°, light output direct, with converter, dimmability: not dimmable, IP54

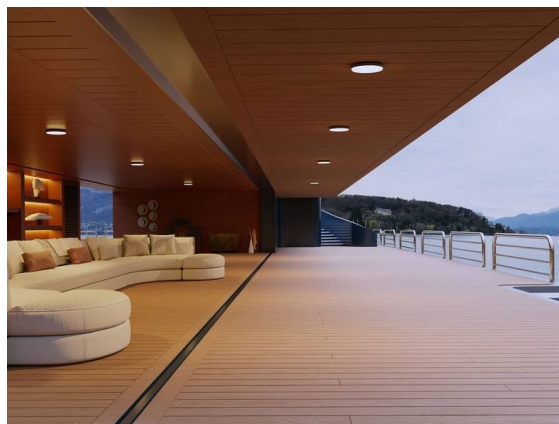

## SKETCH

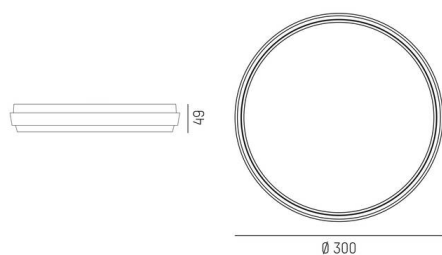

## TECHNICAL DETAILS

|                        |                     |
|------------------------|---------------------|
| Light source           | LED                 |
| System performance [W] | 30                  |
| Luminous flux [lm]     | 2860                |
| Colour temperature     | 3000K               |
| CRI                    | >80                 |
| Optics                 | polycarbonate cover |
| Converter              | with converter      |
| Dimmability            | not dimmable        |
| Light emission area    | direct              |
| Beam angle             | 110°                |
| Voltage                | 220-240V 50/60Hz    |

|                     |                  |
|---------------------|------------------|
| Height [mm]         | 49               |
| Diameter [mm]       | 300              |
| IP protection class | IP54             |
| IP protection class | protection cl. I |
| IK value            | IK10             |


|                         |                |
|-------------------------|----------------|
| Material                | aluminium      |
| Colour of body          | grey           |
| RAL                     | 7042           |
| Lifetime [h]            | L80 B10 20 000 |
| Energy efficiency class | D              |

|                 |               |
|-----------------|---------------|
| Net weight [kg] | 1.23          |
| EAN number      | 9010506456585 |



Energy label

## LIGHT DISTRIBUTION CURVE

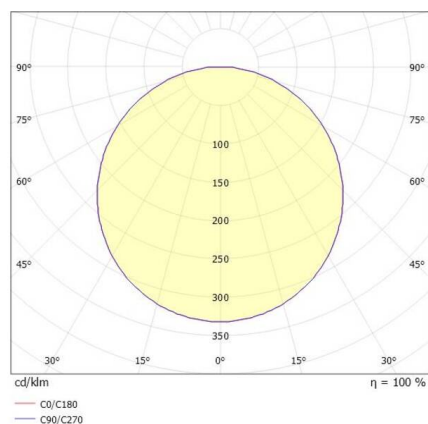

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.