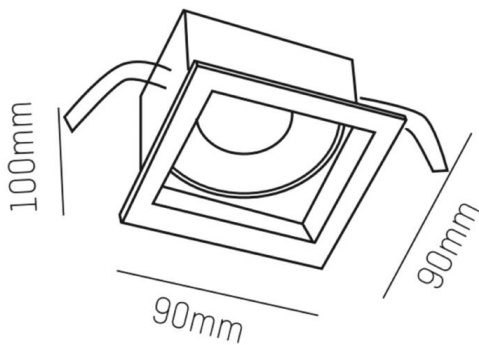
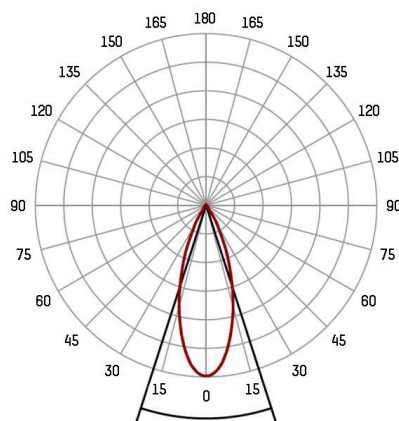


PONTOS**305-621524w27k**

PONTOS SQUARE RECESSED SPOTLIGHT made of aluminium, white, similar to RAL 9003, beam 24°, light output direct, tilting 30°, without converter, max. 250mA, dimmability: see converter, IP44

**SKETCH****TECHNICAL DETAILS**

Light source	LED 10W
Luminous flux [lm]	810
Current sec. [mA]	250
Colour temperature	2700K
CRI	>80
Converter	without converter
Dimmability	see converter
Light emission area	direct
Beam angle	24°
Voltage	40 VDC
Length [mm]	90
Width [mm]	90
Height [mm]	80
Ceiling cutout [mm]	83x83
Mounting depth [mm]	110
IP protection class	IP44
IP protection class	protection cl. III
Material	aluminium
Colour of body	white
RAL	9003
Lifetime [h]	L80 B10 20 000
Energy efficiency class	E
Net weight [kg]	0.22
EAN number	9008905795503

LIGHT DISTRIBUTION CURVE

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.