


NEXT

472-291008bgng1

NEXT W SURFACE MOUNTED WALL LUMINAIRE made of aluminium, black gold, similar to RAL 9005/1036, light output direct / indirect, with converter, max. 350mA, dimmability: not dimmable, IP65




SKETCH



TECHNICAL DETAILS

Light source	LED
System performance [W]	7,5
Luminous flux [lm]	455
Current sec. [mA]	350
Colour temperature	3000K
CRI	>90
Converter	with converter
Dimmability	not dimmable
Light emission area	direct / indirect
Voltage	220-240V 50/60Hz
Length [mm]	100
Width [mm]	100
Height [mm]	100
Protrusion [mm]	100
IP protection class	IP65
IP protection class	protection cl. I
Material	aluminium
Colour of body	black gold
RAL	9005/1036
Lifetime [h]	L80 B10 20 000
Energy efficiency class	D
Net weight [kg]	0.80
EAN number	9008905845734

LIGHT DISTRIBUTION CURVE

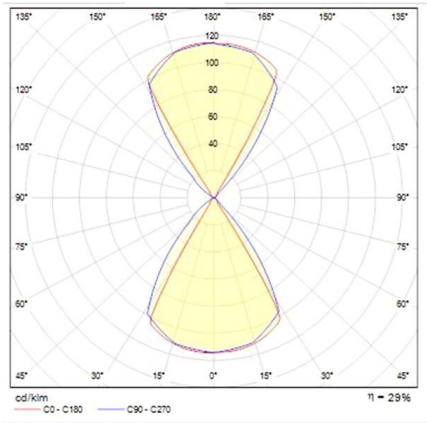

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.