

BOKE

877-BKPSL012LA0300AS


Converter, grey/white, non-dimmable, secondary wire cross-section up to 1.5mm², primary wire cross-section up to 2.5mm², protection against overheating and short-circuiting, mains overvoltages, overload, ceiling insertion cut-out = 49mm, adjustable via DIP switch (see B3): Constant current
230V AC, double terminal block for through-wiring
L157.5mm, W=48mm, H=30mm
220-240V 50/60Hz



TECHNICAL DETAILS

System performance [W]	12
Converter	with converter
Dimmability	not dimmable
Voltage	220-240V 50/60Hz
Length [mm]	157,5
Width [mm]	48
Height [mm]	30
Ceiling cutout [mm]	49,5
IP protection class	IP20
IP protection class	protection cl. II
Material	synthetic
Colour of body	grey
Number of luminaires B16A	49
Net weight [kg]	0.21
EAN number	9010979809932

SKETCH

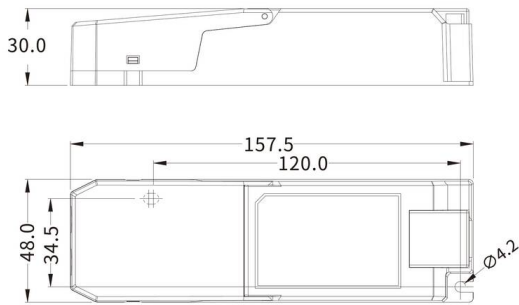

LIGHT DISTRIBUTION CURVE

Einstellbar mittels/Adjustable with DIP-Switch:		
mA	W	V DC
200	8	28-42
250	10	28-42
300	12	28-42



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.