

TCI

24-151403


MINI JOLLY DALI 20, DALI dimmable, amplitude dimming (AM), active power factor corrector, protection against overheating and short circuits, mains surges, and overloads, ceiling cutout = 55 mm, adjustable via DIP switch (see B3): (constant current/constant voltage)
 L = 111 mm, W = 52 mm, H = 22 mm
 220-240 V 50/60 Hz



TECHNICAL DETAILS

System performance [W]	12-20
Converter	with converter
Dimmability	DALI 2
Voltage	220-240V 50/60Hz
Length [mm]	111
Width [mm]	52
Height [mm]	22
IP protection class	IP20
IP protection class	protection cl. II
Material	synthetic
Colour of body	white
Number of luminaires B16A	50
Net weight [kg]	0.11
EAN number	9008905796128

SKETCH

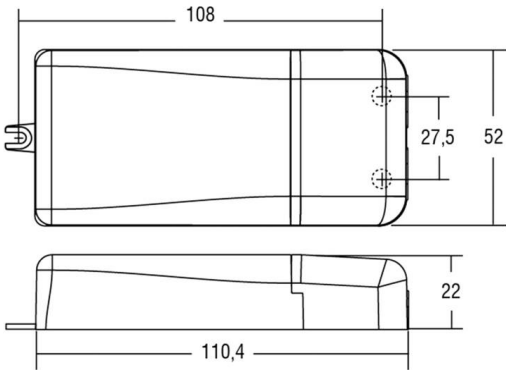

LIGHT DISTRIBUTION CURVE

Einstellbar mittels DIP-SWITCH:

Konstantstrom

mA	W	V DC	mA	W	V DC
250	12	49	500	20	40
350	17	49	550	20	36
400	19	49	600	20	33
450	20	45	700	20	28



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.