



AEON

305-604530wddd

AEON ROUND SURFACE MOUNTED CEILING LUMINAIRE made of aluminium, white, similar to RAL 9003, beam 45°, light output direct, with converter, max. 350mA, dimmability: DALI, IP20

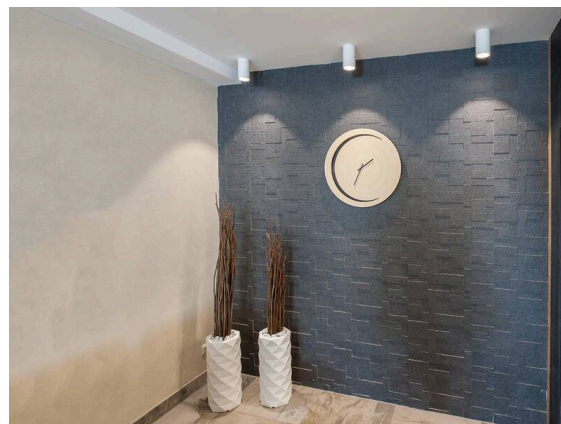


SKETCH

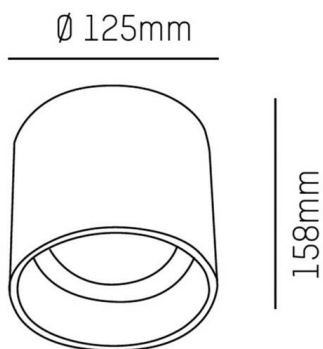

TECHNICAL DETAILS

Light source	LED
System performance [W]	15
Luminous flux [lm]	1550
Current sec. [mA]	350
Colour temperature	3000K
CRI	>80
Converter	with converter
Dimmability	DALI
Light emission area	direct
Beam angle	45°
Voltage	220-240V 50/60Hz
Height [mm]	158
Diameter [mm]	125
IP protection class	IP20
IP protection class	protection cl. I
Material	aluminium
Colour of body	white
RAL	9003
Lifetime [h]	L80 B10 72 000
Energy efficiency class	E
Number of luminaires B16A	61
Net weight [kg]	1.19
EAN number	9008905807084

LIGHT DISTRIBUTION CURVE

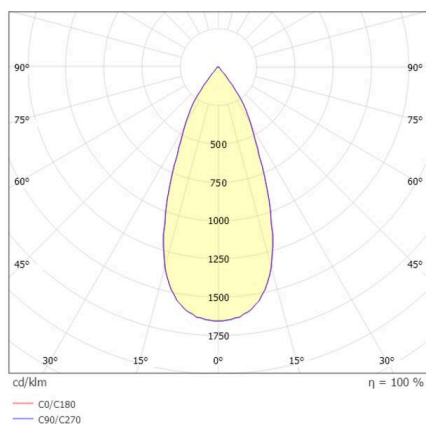

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.