


## YARA

273-1000s

YARA ROUND F BOLLARD grey, similar to RAL 7012, beam 360°, with converter, max. 200mA, dimmability: not dimmable, IP65




## SKETCH



## TECHNICAL DETAILS

|                           |                  |
|---------------------------|------------------|
| Light source              | LED              |
| System performance [W]    | 8,5              |
| Luminous flux [lm]        | 685              |
| Current sec. [mA]         | 200              |
| Colour temperature        | 3000K            |
| CRI                       | >80              |
| Converter                 | with converter   |
| Dimmability               | not dimmable     |
| Beam angle [°]            | 360°             |
| Voltage                   | 220-240V 50/60Hz |
| Height [mm]               | 800              |
| Diameter [mm]             | 165              |
| IP protection class       | IP65             |
| IP protection class       | protection cl. I |
| IK value                  | IK08             |
| Colour of body            | grey             |
| RAL                       | 7012             |
| Lifetime [h]              | L80 B10 20 000   |
| Energy efficiency class   | D                |
| Number of luminaires B16A | 56               |
| Net weight [kg]           | 3.58             |
| EAN number                | 9008905807947    |

## LIGHT DISTRIBUTION CURVE

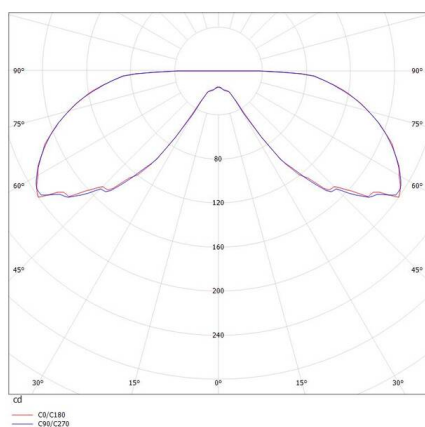

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.