


YARA

273-1000s

YARA ROUND F BOLLARD grey, similar to RAL 7012, beam 360°, with converter, max. 200mA, dimmability: not dimmable, IP65




SKETCH



TECHNICAL DETAILS

Light source	LED
System performance [W]	8,5
Luminous flux [lm]	685
Current sec. [mA]	200
Colour temperature	3000K
CRI	>80
Converter	with converter
Dimmability	not dimmable
Beam angle	360°
Voltage	220-240V 50/60Hz
Height [mm]	800
Diameter [mm]	165
IP protection class	IP65
IP protection class	protection cl. I
IK value	IK08
Colour of body	grey
RAL	7012
Lifetime [h]	L80 B10 20 000
Energy efficiency class	D
Number of luminaires B16A	56
Net weight [kg]	3.58
EAN number	9008905807947

LIGHT DISTRIBUTION CURVE

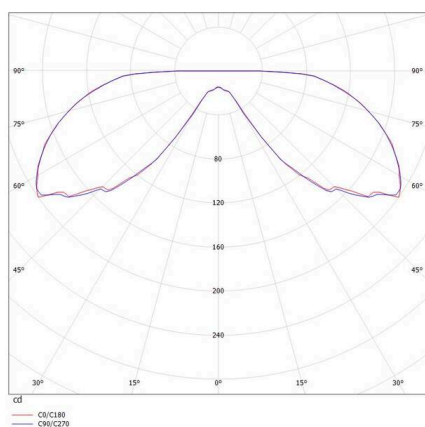

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.