

**ELIX MINI**

**276-0130690343056**


ELIX MINI R RECESSED SPOTLIGHT made of aluminium, white, similar to RAL 9003, decor black, beam 28°, light output direct, swiveling 350°, tilting 90°, without converter, max. 350mA, dimmability: see converter, IP20



**TECHNICAL DETAILS**


Light source	LED 6W
Luminous flux [lm]	340
Current sec. [mA]	350
Colour temperature	3000K
CRI	>90
Converter	without converter
Dimmability	see converter
Light emission area	direct
Beam angle	28°
Voltage	17,6 VDC
Length [mm]	70
Height [mm]	95
Diameter [mm]	70
Ceiling cutout [mm]	64
Mounting depth [mm]	125
IP protection class	IP20
IP protection class	protection cl. III
Material	aluminium
Colour of body	white
RAL	9003
Colour of decor	black
Lifetime [h]	L80 B10 20 000
Energy efficiency class	E
Net weight [kg]	0.29
EAN number	9008905906480

**SKETCH**

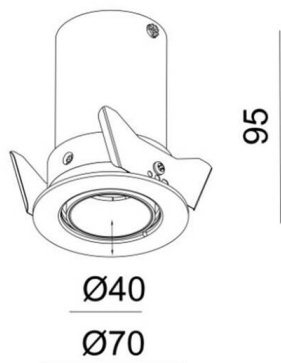

Energy label

**LIGHT DISTRIBUTION CURVE**

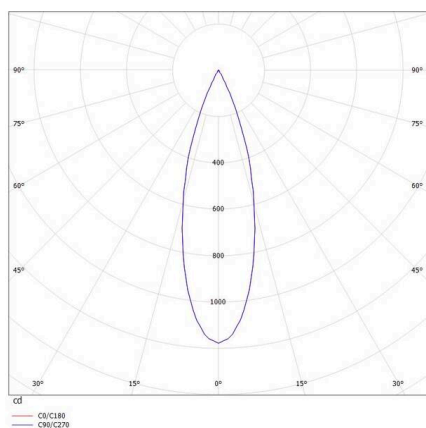

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.