
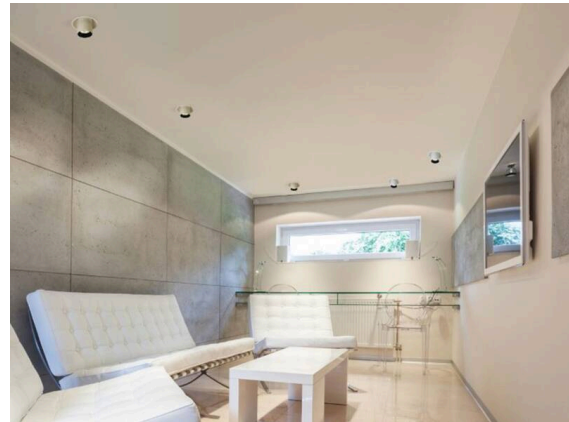


ELIX


276-0010990333056

ELIX R RECESSED SPOTLIGHT made of aluminium, white, similar to RAL 9003, decor black, beam 33°, light output direct, swiveling 355°, tilting 45°, without converter, max. 500mA, dimmability: see converter, IP20

SKETCH

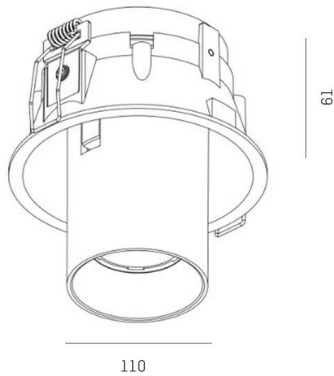

LIGHT DISTRIBUTION CURVE

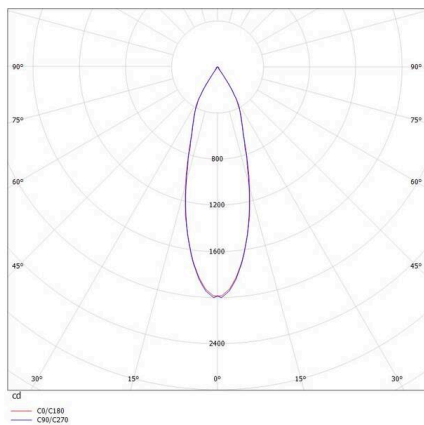

TECHNICAL DETAILS

Light source	LED 9W
Luminous flux [lm]	770
Current sec. [mA]	500
Colour temperature	3000K
CRI	>90
Converter	without converter
Dimmability	see converter
Light emission area	direct
Beam angle	33°
Voltage	17,8 VDC
Length [mm]	56
Height [mm]	62
Diameter [mm]	110
Ceiling cutout [mm]	102
Mounting depth [mm]	91
IP protection class	IP20
IP protection class	protection cl. III
Material	aluminium
Colour of body	white
RAL	9003
Colour of decor	black
Lifetime [h]	L80 B10 20 000
Energy efficiency class	E
Net weight [kg]	0.70
EAN number	9008905795138



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.