


CLARUS

276-0151090402763tr

CLARUS W SURFACE MOUNTED WALL LUMINAIRE made of aluminium, black gold, similar to RAL 9005/1036, beam 40°, light output direct / indirect, swiveling 350°, tilting 90°, with converter, dimmability: not dimmable, IP20




SKETCH

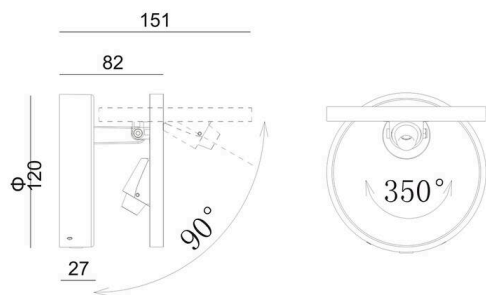

TECHNICAL DETAILS

Light source	LED
System performance [W]	8,5
Luminous flux [lm]	400
Colour temperature	2700K
CRI	>90
Converter	with converter
Dimmability	not dimmable
Light emission area	direct / indirect
Beam angle	40°
Voltage	220-240V 50/60Hz
Height [mm]	82
Diameter [mm]	120
IP protection class	IP20
IP protection class	protection cl. I
Material	aluminium
Colour of body	black gold
RAL	9005/1036
Lifetime [h]	L80 B10 20 000
Energy efficiency class	E
Net weight [kg]	0.71
EAN number	9008905787423

LIGHT DISTRIBUTION CURVE

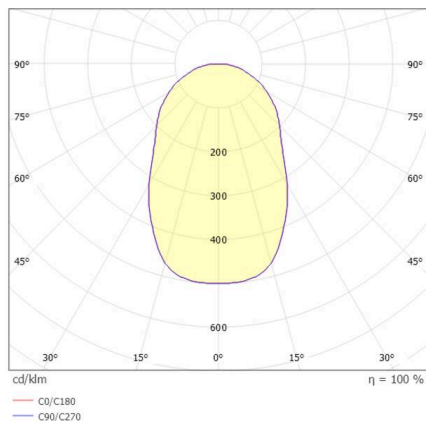

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.