



POLUS

276-0091190003063

POLUS SD SURFACE MOUNTED CEILING LUMINAIRE made of aluminium, black gold, similar to RAL 9005/1036, light output direct, with converter, dimmability: not dimmable, IP44

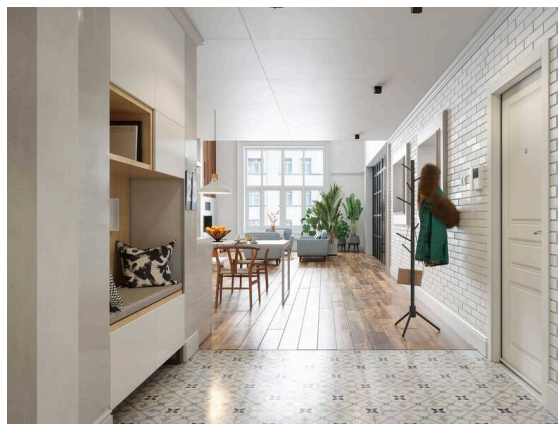


SKETCH

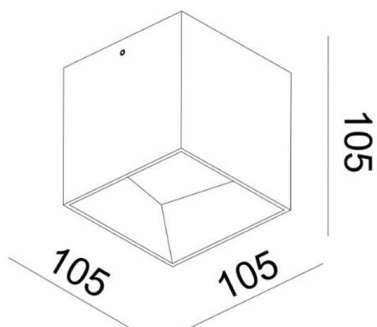

TECHNICAL DETAILS

Light source	LED
System performance [W]	12
Luminous flux [lm]	750
Colour temperature	3000K
CRI	>90
Converter	with converter
Dimmability	not dimmable
Light emission area	direct
Voltage	220-240V 50/60Hz
Length [mm]	105
Width [mm]	105
Height [mm]	105
IP protection class	IP44
IP protection class	protection cl. I
Material	aluminium
Colour of body	black gold
RAL	9005/1036
Lifetime [h]	L80 B10 20 000
Energy efficiency class	F
Net weight [kg]	0.71
EAN number	9008905906565

LIGHT DISTRIBUTION CURVE

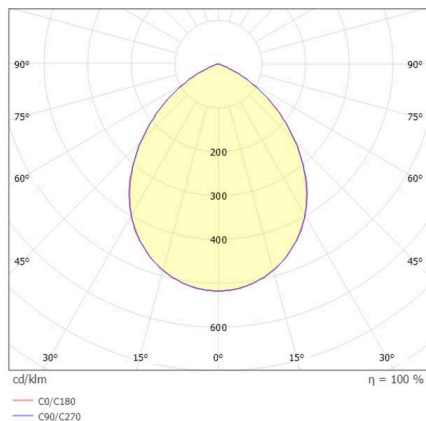

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.