



PAN

305-0130380003004

PAN RECESSED WALL LUMINAIRE made of aluminium, grey, similar to RAL 9006, light output direct, without converter, max. 250mA, dimmability: see converter, IP20

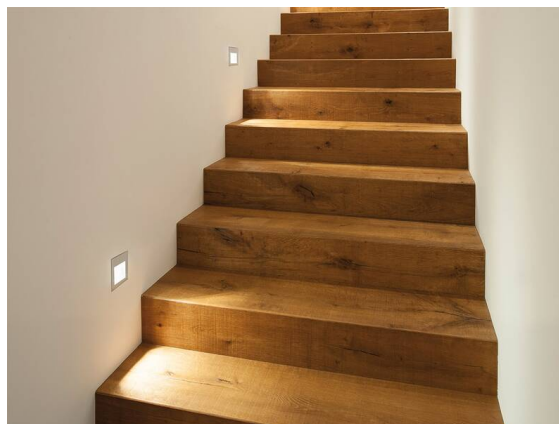


SKETCH



TECHNICAL DETAILS

Light source	LED 2W
Luminous flux [lm]	155
Current sec. [mA]	250
Colour temperature	3000K
CRI	>80
Converter	without converter
Dimmability	see converter
Light emission area	direct
Voltage	9 VDC
Length [mm]	80
Width [mm]	80
Height [mm]	30
Ceiling cutout [mm]	69x69
Mounting depth [mm]	62
IP protection class	IP20
IP protection class	protection cl. III
Material	aluminium
Colour of body	grey
RAL	9006
Lifetime [h]	L80 B10 60 000
Energy efficiency class	E
Net weight [kg]	0.15
EAN number	9008905918582

LIGHT DISTRIBUTION CURVE

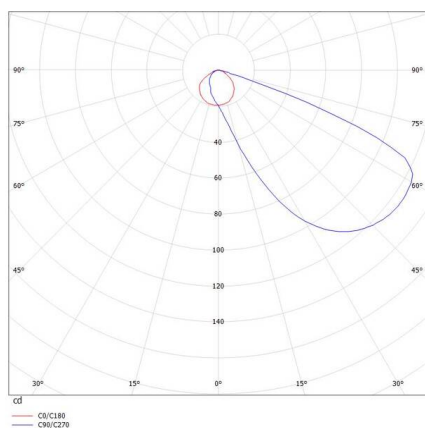

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.