



# ALICA

472-0000790003005

ALICA W SURFACE MOUNTED WALL LUMINAIRE made of aluminium, white, similar to RAL 9003, light output direct / indirect, with converter, max. 200mA, dimmability: not dimmable, IP20

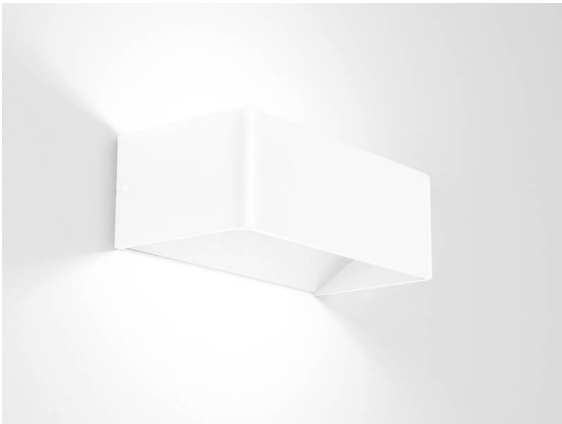


## SKETCH



## TECHNICAL DETAILS

|                         |                   |
|-------------------------|-------------------|
| Light source            | LED               |
| System performance [W]  | 8                 |
| Luminous flux [lm]      | 420               |
| Current sec. [mA]       | 200               |
| Colour temperature      | 3000K             |
| CRI                     | >90               |
| Converter               | with converter    |
| Dimmability             | not dimmable      |
| Light emission area     | direct / indirect |
| Voltage                 | 220-240V 50/60Hz  |
| Length [mm]             | 200               |
| Width [mm]              | 100               |
| Height [mm]             | 70                |
| IP protection class     | IP20              |
| IP protection class     | protection cl. I  |
| Material                | aluminium         |
| Colour of body          | white             |
| RAL                     | 9003              |
| Lifetime [h]            | L80 B10 20 000    |
| Energy efficiency class | D                 |
| Net weight [kg]         | 0.75              |
| EAN number              | 9008905795350     |

## LIGHT DISTRIBUTION CURVE

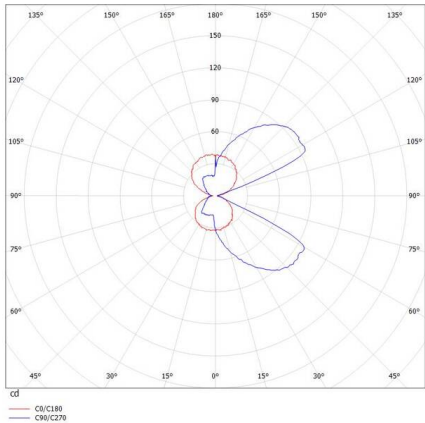

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.