## CHICCO


## 308-0010790303006

CHICCO ROUND R RECESSED SPOTLIGHT made of aluminium, black, similar to RAL 9005, beam 30°, light output direct, without converter, max. 350mA, dimmability: see converter, IP65/IP20






### Sketch




### Technical details

| | |
|---|---|
| Light source | LED 6W |
| Luminous flux [lm] | 560 |
| Current sec. [mA] | 350 |
| Colour temperature | 3000K |
| CRI | >90 |
| Converter | without converter |
| Dimmability | see converter |
| Light emission area | direct |
| Beam angle | 30° |
| Voltage | 20 VDC |
| | |
| Height [mm] | 50 |
| Diameter [mm] | 90 |
| Ceiling cutout [mm] | 78 |
| Mounting depth [mm] | 80 |
| IP protection class | IP65/IP20 |
| IP protection class | protection cl. III |
| | |
| Material | aluminium |
| Colour of body | black |
| RAL | 9005 |
| Lifetime [h] | L80 B10 20 000 |
| Energy efficiency class | E |
| | |
| Net weight [kg] | 0.25 |
| EAN number | 9008905839788 |

### Light distribution curve

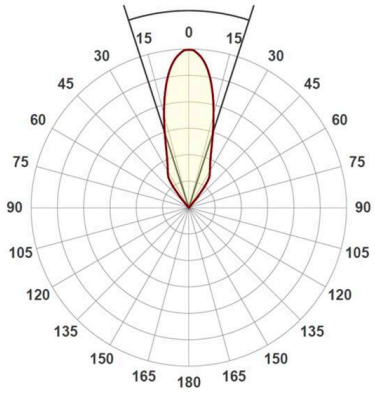


Energy label

CE

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.