



## RADO

56-6111ng2

RADO WR RECESSED SPOTLIGHT made of aluminium, chrome, polycarbonate cover beam 30°, light output direct, without converter, max. 500mA, dimmability: see converter, IP54

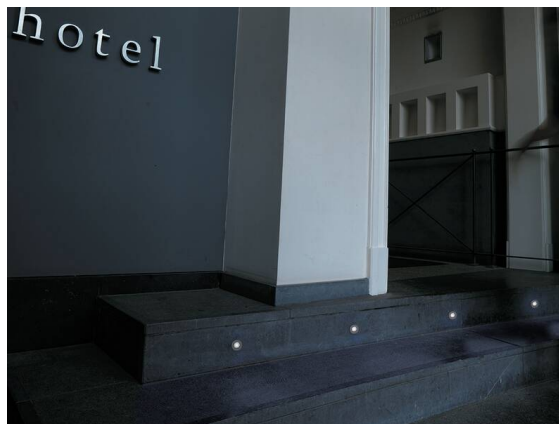

## SKETCH

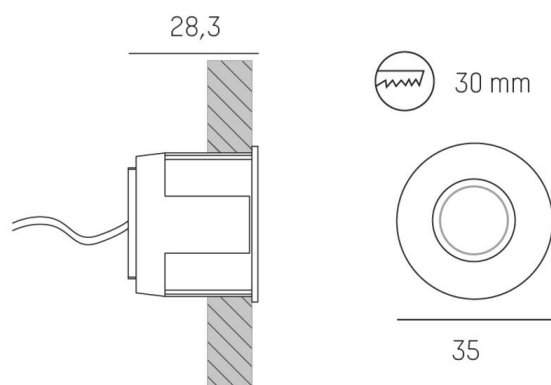

## TECHNICAL DETAILS

|                         |                     |
|-------------------------|---------------------|
| Light source            | LED 2W              |
| System performance [W]  | 2                   |
| Luminous flux [lm]      | 162                 |
| Current sec. [mA]       | 500                 |
| Colour temperature      | 3000K               |
| CRI                     | >90                 |
| Optics                  | polycarbonate cover |
| Converter               | without converter   |
| Dimmability             | see converter       |
| Light emission area     | direct              |
| Beam angle              | 30°                 |
| Diameter [mm]           | 35                  |
| Ceiling cutout [mm]     | 30                  |
| Mounting depth [mm]     | 29                  |
| IP protection class     | IP54                |
| IP protection class     | protection cl. III  |
| Material                | aluminium           |
| Colour of body          | chrome              |
| Lifetime [h]            | 50 000              |
| Energy efficiency class | C                   |
| Net weight [kg]         | 0.03                |
| EAN number              | 9010506813876       |



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.