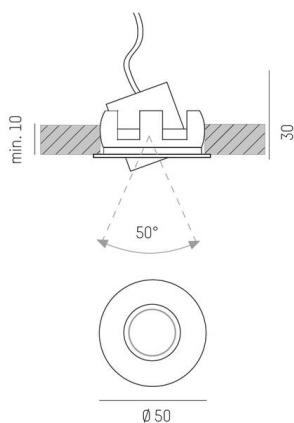


KADO**56-6126ng2**

KADO R RECESSED SPOTLIGHT made of aluminium, chrome, high quality plastic lens beam 12°, light output direct, tilting 50°, without converter, max. 500mA, dimmability: see converter, IP40

**SKETCH**

42 mm

**TECHNICAL DETAILS**

Light source	LED 2W
Luminous flux [lm]	162
Current sec. [mA]	500
Colour temperature	3000K
CRI	>90
Optics	high quality plastic lens
Converter	without converter
Dimmability	see converter
Light emission area	direct
Beam angle	12°
Diameter [mm]	50
Ceiling cutout [mm]	42
Mounting depth [mm]	30
IP protection class	IP40
IP protection class	protection cl. III
Material	aluminium
Colour of body	chrome
Lifetime [h]	50 000
Energy efficiency class	F
Net weight [kg]	0.06
EAN number	9010506813906



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.