




RUBE PDI

757-lr15041050dali

RUBE PDI SUSPENSION made of aluminium, white, microprismatic PMMA cover for perfect anti-glare light output direct / indirect, UGR <19, with converter, dimmability: DALI, cable transparent, pendant length 2500mm, IP20

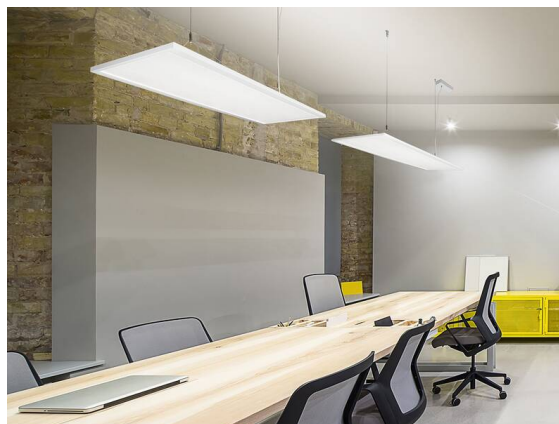

SKETCH

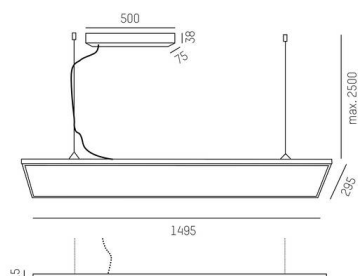

TECHNICAL DETAILS


Light source LED
 System performance [W] 49
 Luminous flux [lm] 5100
 Colour temperature 4000K
 CRI >80
 UGR <19
 Optics microprismatic cover
 Converter with converter
 Dimmability DALI
 Light emission area direct / indirect
 Voltage 220-240V 50/60Hz

Length [mm] 1495
 Width [mm] 295
 Height [mm] 15
 Length pendant [mm] 2500
 IP protection class IP20
 IP protection class protection cl. I

Material aluminium
 Colour of body white
 Cable transparent
 Lifetime [h] 50 000
 Energy efficiency class D

Net weight [kg] 6.43
 EAN number 9010979523685

LIGHT DISTRIBUTION CURVE

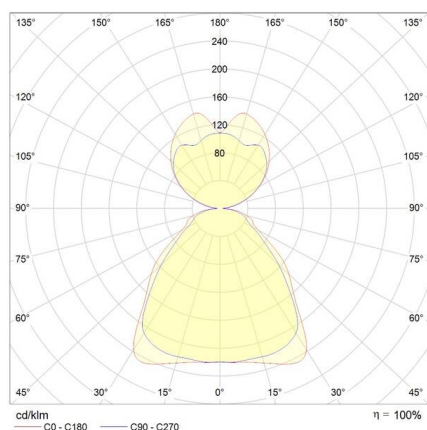

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.