



RADO

56-6011ng2

RADO WR RECESSED SPOTLIGHT made of aluminium, satined chrome, high quality plastic lens beam 30°, light output direct, without converter, max. 500mA, dimmability: see converter, IP54

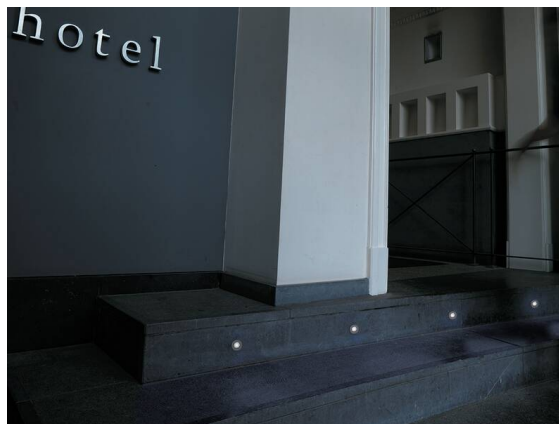

SKETCH

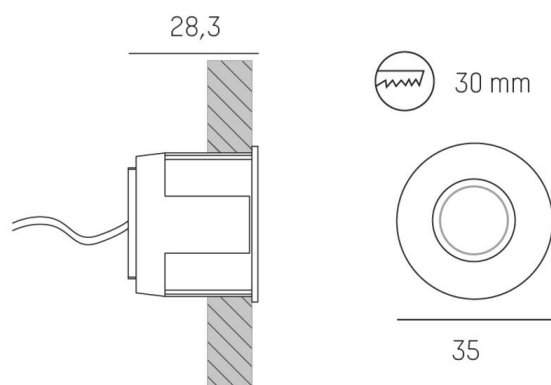

TECHNICAL DETAILS

Light source	LED 2W
Luminous flux [lm]	126
Current sec. [mA]	500
Colour temperature	3000K
CRI	>90
Optics	high quality plastic lens
Converter	without converter
Dimmability	see converter
Light emission area	direct
Beam angle	30°
Diameter [mm]	35
Ceiling cutout [mm]	30
Mounting depth [mm]	28,3
IP protection class	IP54
IP protection class	protection cl. III
Material	aluminium
Colour of body	satined chrome
Lifetime [h]	50 000
Energy efficiency class	C
Net weight [kg]	0.03
EAN number	9010506813852



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.