


MUSO

501-q3319150

MUSO SQUARE SD SURFACE MOUNTED CEILING LUMINAIRE made of synthetic, white, similar to RAL 9003, polycarbonate cover beam 115°, light output direct, with converter, max. 320mA, dimmability: not dimmable, IP54




SKETCH

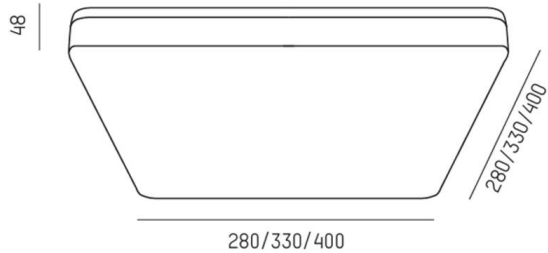

TECHNICAL DETAILS

Light source	LED
System performance [W]	24
Luminous flux [lm]	2270
Current sec. [mA]	320
Colour temperature	3000K
CRI	>80
Optics	polycarbonate cover
Converter	with converter
Dimmability	not dimmable
Light emission area	direct
Beam angle	115°
Voltage	220-240V 50/60Hz
Length [mm]	330
Width [mm]	330
Height [mm]	48
IP protection class	IP54
IP protection class	protection cl. II
IK value	IK08
Material	synthetic
Colour of body	white
RAL	9003
Lifetime [h]	L80 B10 50 000
Energy efficiency class	E
Number of luminaires B16A	50
Net weight [kg]	1.50
EAN number	9008905920783

LIGHT DISTRIBUTION CURVE

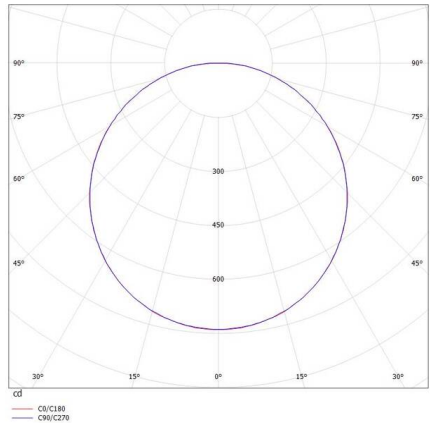

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.