


ZH00M

56-185027ng1


ZH00M WR RECESSED WALL LUMINAIRE made of aluminium, black, high quality glass lens light output direct, without converter, max. 500mA, dimmability: see converter, IP20




SKETCH



Ø 38 mm
ET 15 mm

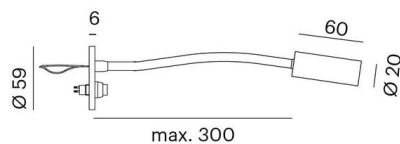

LIGHT DISTRIBUTION CURVE

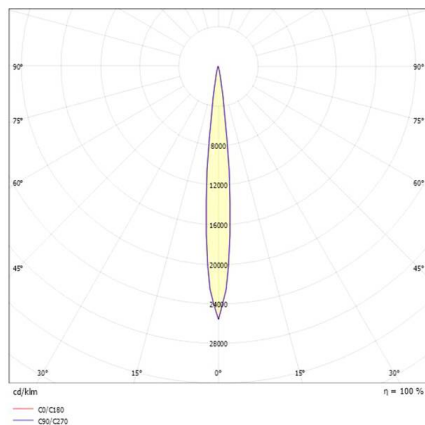

TECHNICAL DETAILS

Light source	LED 2W
System performance [W]	2
Luminous flux [lm]	150
Current sec. [mA]	500
Colour temperature	3000K
CRI	>90
Optics	high quality glass lens
Converter	without converter
Dimmability	see converter
Light emission area	direct
Voltage	220-240V 50/60Hz
Length [mm]	300
Width [mm]	5,5
Diameter [mm]	59
Protrusion [mm]	300
Ceiling cutout [mm]	38
Mounting depth [mm]	15
IP protection class	IP20
IP protection class	protection cl. III
Material	aluminium
Colour of body	black
Lifetime [h]	50 000
Energy efficiency class	E
Net weight [kg]	0.17
EAN number	9010506782707



Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.