



# YARA

273-1002s

YARA SQUARE F BOLLARD grey, similar to RAL 7012, beam 360°, with converter, max. 200mA, dimmability: not dimmable, IP65

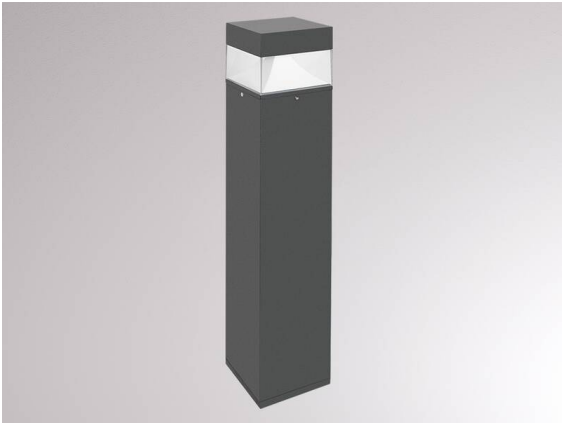


## SKETCH

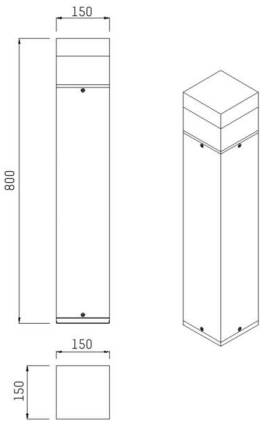

## TECHNICAL DETAILS

|                         |                  |
|-------------------------|------------------|
| Light source            | LED              |
| System performance [W]  | 8,5              |
| Luminous flux [lm]      | 800              |
| Current sec. [mA]       | 200              |
| Colour temperature      | 3000K            |
| CRI                     | >80              |
| Converter               | with converter   |
| Dimmability             | not dimmable     |
| Beam angle              | 360°             |
| Voltage                 | 220-240V 50/60Hz |
| Length [mm]             | 150              |
| Width [mm]              | 150              |
| Height [mm]             | 800              |
| IP protection class     | IP65             |
| IP protection class     | protection cl. I |
| IK value                | IK10             |
| Colour of body          | grey             |
| RAL                     | 7012             |
| Lifetime [h]            | L80 B10 20 000   |
| Energy efficiency class | D                |
| Net weight [kg]         | 4.50             |
| EAN number              | 9010506027570    |

## LIGHT DISTRIBUTION CURVE

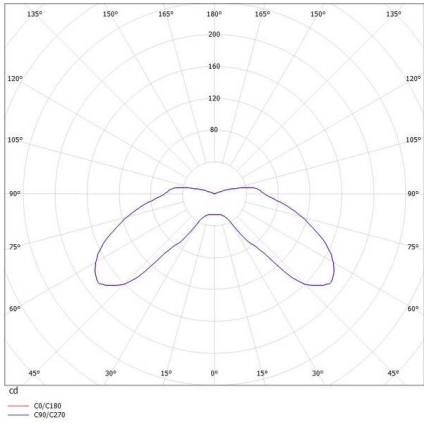

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.  
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.