



RUBE PDI

757-lr12031050bs

RUBE PDI SUSPENSION made of aluminium, black, microprismatic PMMA cover for perfect anti-glare light output direct / indirect, UGR <19, with converter, dimmability: not dimmable, cable transparent, pendant length 2500mm, IP20

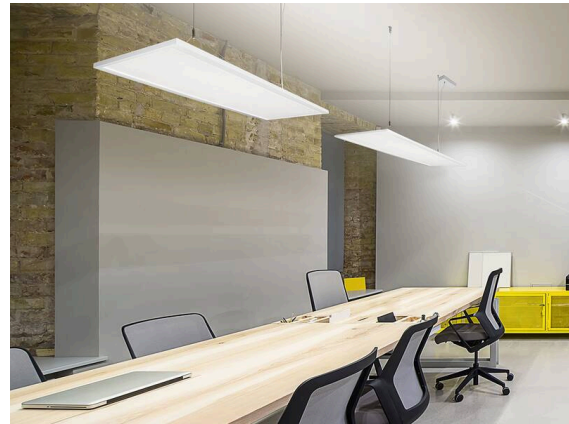

SKETCH

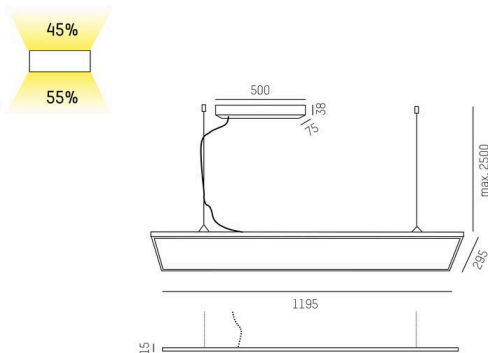

TECHNICAL DETAILS

Light source LED
 System performance [W] 54
 Luminous flux [lm] 5800
 Colour temperature 3000K
 CRI >80
 UGR <19
 Optics microprismatic cover
 Converter with converter
 Dimmability not dimmable
 Light emission area direct / indirect
 Voltage 220-240V 50/60Hz

Length [mm] 1195
 Width [mm] 295
 Height [mm] 15
 Length pendant [mm] 2500
 IP protection class IP20
 IP protection class

1195
 295
 15
 2500
 IP20
 protection cl. I


Material aluminium
 Colour of body black
 Cable transparent
 Lifetime [h] 50 000
 Energy efficiency class D

aluminium
 black
 transparent
 50 000
 D

Net weight [kg] 5.07
 EAN number 9010979523487

5.07
 9010979523487

LIGHT DISTRIBUTION CURVE

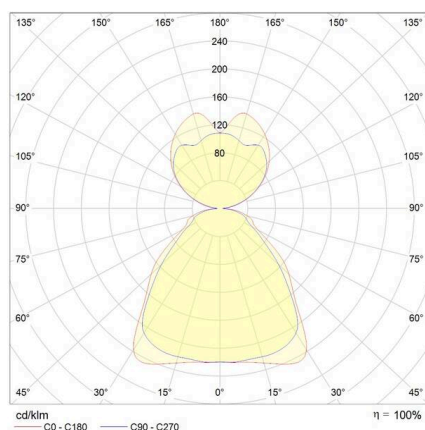

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
 Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.