




RUBE PDI

757-lr15031050bs

RUBE PDI SUSPENSION made of aluminium, black, microprismatic PMMA cover for perfect anti-glare light output direct / indirect, UGR <19, with converter, dimmability: not dimmable, cable transparent, pendant length 2500mm, IP20

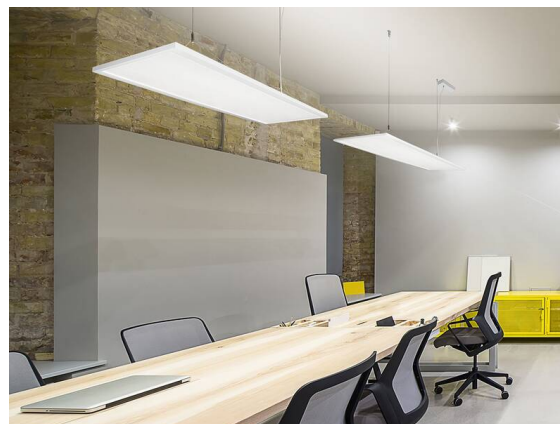

SKETCH

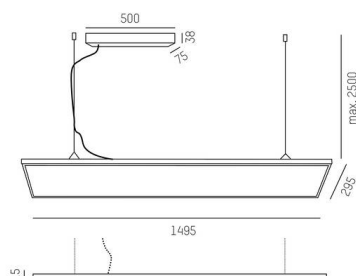

TECHNICAL DETAILS


Light source	LED
System performance [W]	49
Luminous flux [lm]	5100
Colour temperature	3000K
CRI	>80
UGR	<19
Optics	microprismatic cover
Converter	with converter
Dimmability	not dimmable
Light emission area	direct / indirect
Voltage	220-240V 50/60Hz

Length [mm]	1495
Width [mm]	295
Height [mm]	15
Length pendant [mm]	2500
IP protection class	IP20
IP protection class	protection cl. I

Material	aluminium
Colour of body	black
Cable	transparent
Lifetime [h]	50 000
Energy efficiency class	D

Net weight [kg]	6.57
EAN number	9010979523593

LIGHT DISTRIBUTION CURVE

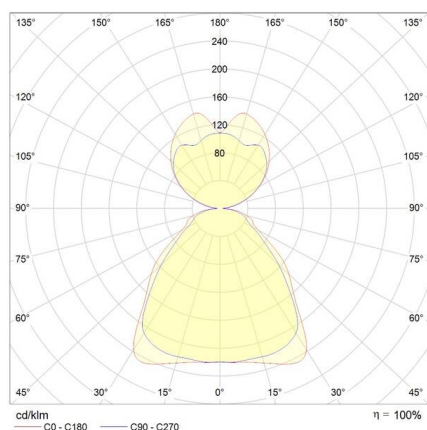

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.