

SATOR

305-30019600

SATOR ROUND R RECESSED SPOTLIGHT made of aluminium, black, similar to RAL 9005, beam 24°, light output direct, tilting 30°, without converter, max. 250mA, dimmability: see converter, IP44/IP20




SKETCH



1 - 20 mm


Ø 68 mm, **ET 119 mm**



TECHNICAL DETAILS

Light source	LED 9W
Luminous flux [lm]	620
Current sec. [mA]	250
Colour temperature	3000K
CRI	>90
Converter	without converter
Dimmability	see converter
Light emission area	direct
Beam angle	24°
Voltage	36 VDC
Height [mm]	89
Diameter [mm]	72
Ceiling cutout [mm]	68
Mounting depth [mm]	119
IP protection class	IP44/IP20
IP protection class	protection cl. III
Material	aluminium
Colour of body	black
RAL	9005
Lifetime [h]	L80 B10 20 000
Energy efficiency class	G
Net weight [kg]	0.24
EAN number	9010506136807

LIGHT DISTRIBUTION CURVE

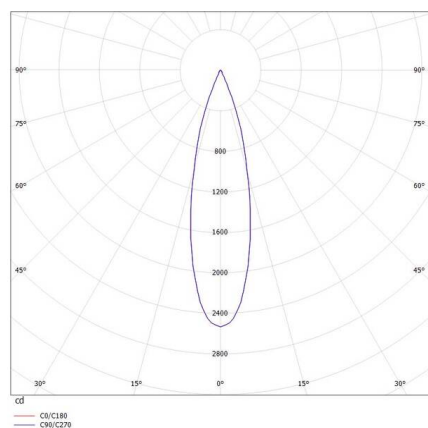

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.