


LIRO

472-30013560


LIRO R RECESSED SPOTLIGHT made of aluminium, white, similar to RAL 9003/9005, beam 30°, light output direct, without converter, max. 500mA, dimmability: see converter, IP20

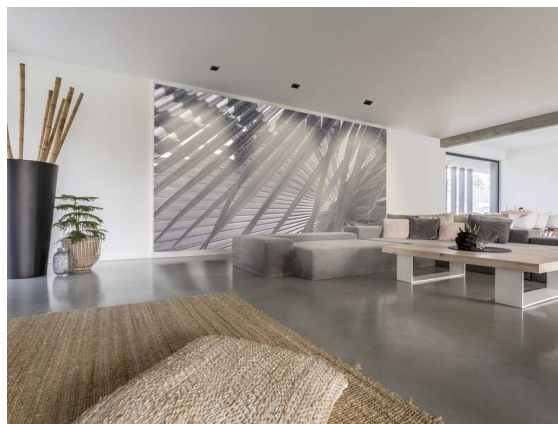

SKETCH



1 - 20 mm

62 x 62 mm, **ET 65 mm**

TECHNICAL DETAILS


Light source	LED 6W
Luminous flux [lm]	460
Current sec. [mA]	500
Colour temperature	2700K
CRI	>90
Converter	without converter
Dimmability	see converter
Light emission area	direct
Beam angle [°]	30°
Length [mm]	70
Width [mm]	70
Height [mm]	35
Ceiling cutout [mm]	62x62
Mounting depth [mm]	65
IP protection class	IP20
IP protection class	protection cl. III
Material	aluminium
Colour of body	white
RAL	9003/9005
Lifetime [h]	L80 B10 20 000
Energy efficiency class	G

Net weight [kg]	0.10
EAN number	9010506139679



Energy label

LIGHT DISTRIBUTION CURVE

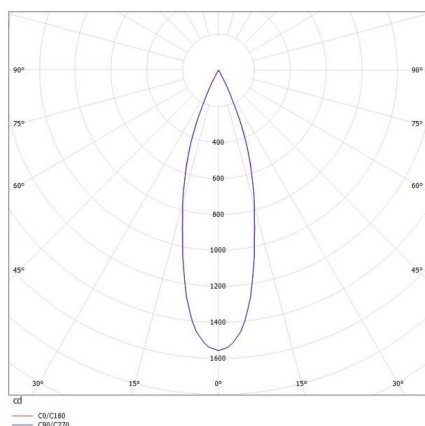

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.