


LIRO

472-30019560

LIRO R RECESSED SPOTLIGHT made of aluminium, white, similar to RAL 9003/9005, beam 30°, light output direct, without converter, max. 500mA, dimmability: see converter, IP20

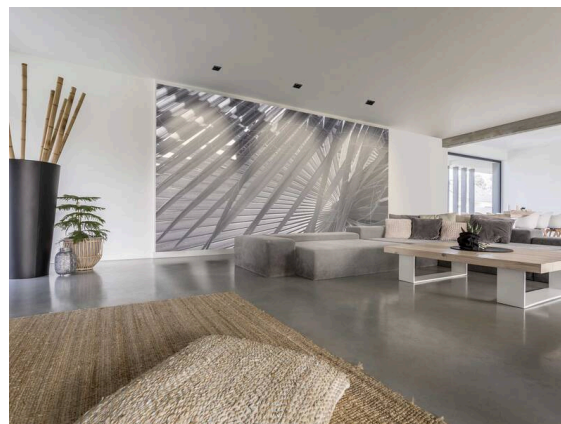


SKETCH



1 - 20 mm


62 x 62 mm, **ET 65 mm**



TECHNICAL DETAILS

Light source	LED 6W
Luminous flux [lm]	500
Current sec. [mA]	500
Colour temperature	3000K
CRI	>90
Converter	without converter
Dimmability	see converter
Light emission area	direct
Beam angle [°]	30°
Length [mm]	70
Width [mm]	70
Height [mm]	35
Ceiling cutout [mm]	62x62
Mounting depth [mm]	65
IP protection class	IP20
IP protection class	protection cl. III
Material	aluminium
Colour of body	white
RAL	9003/9005
Lifetime [h]	L80 B10 20 000
Energy efficiency class	G
Net weight [kg]	0.10
EAN number	9010506139693

LIGHT DISTRIBUTION CURVE

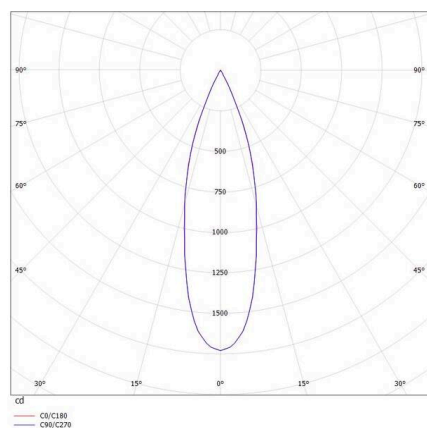

Energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.