


ALICA

472-0000790003063

ALICA W SURFACE MOUNTED WALL LUMINAIRE made of aluminium, black gold, similar to RAL 9005/1036, light output direct / indirect, with converter, max. 200mA, dimmability: not dimmable, IP20



SKETCH




TECHNICAL DETAILS

Light source	LED
System performance [W]	8
Luminous flux [lm]	320
Current sec. [mA]	200
Colour temperature	3000K
CRI	>90
Converter	with converter
Dimmability	not dimmable
Light emission area	direct / indirect
Voltage	220-240V 50/60Hz
Length [mm]	200
Width [mm]	100
Height [mm]	70
IP protection class	IP20
IP protection class	protection cl. I
Material	aluminium
Colour of body	black gold
RAL	9005/1036
Lifetime [h]	L80 B10 20 000
Energy efficiency class	D
Net weight [kg]	0.71
EAN number	9008905934032



Energy label

LIGHT DISTRIBUTION CURVE

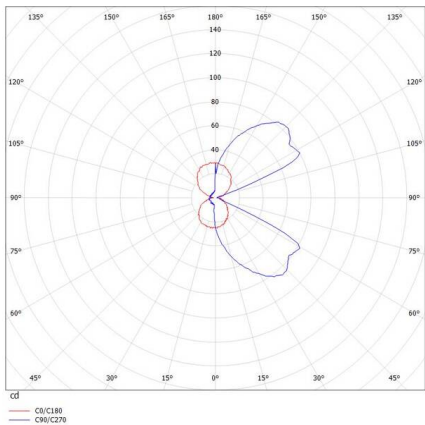

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.