

DESCO

341-r2419150

DESCO S SD SURFACE MOUNTED CEILING LUMINAIRE made of aluminium, white, similar to RAL 9003, satined PMMA opal diffuser beam 115°, light output direct, with converter, max. 500mA, dimmability: phase section, IP20



SKETCH



TECHNICAL DETAILS

Light source	LED
System performance [W]	15
Luminous flux [lm]	850/935/940
Current sec. [mA]	500
Colour temperature	2700K/3000K/4000K
CRI	>90
Optics	PMMA opal diffuser
Converter	with converter
Dimmability	phase section
Light emission area	direct
Beam angle [°]	115°
Voltage	220-240V 50/60Hz

Height [mm]	50
Diameter [mm]	240
IP protection class	IP20
IP protection class	protection cl. I


Material	aluminium
Colour of body	white
RAL	9003
Lifetime [h]	L80 B10 20 000
Ambient temperature	from 0° to +35°
Energy efficiency class	E
Number of luminaires B16A	160

Net weight [kg]	0.61
EAN number	9010506617757



Energy label

LIGHT DISTRIBUTION CURVE

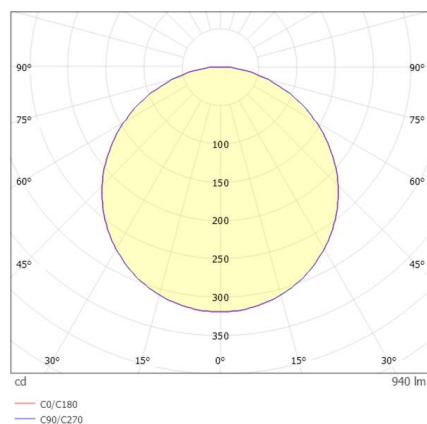

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%.
Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.